


light strip #112544000-00001328




SLIM LED - LIQ 6

connected load	22-29 V; DC
fitted with	6 x Light-emitting diode
work equipment	without
mains lead	approx. 3.0 m (10 ft); with free stranded wires
design	mounted version
luminaire body	aluminium/plastic
material	anodised
surface	screws
fastening	approx. 4 W
power consumption	without switch
usage	acrylic clear
lamp cover	IP 67
system of protection	III
class of protection	aluminium colored anodised
colour luminaire body	196 mm (7.7")
total length	direction of beam +/- 45° adjustable
special features	

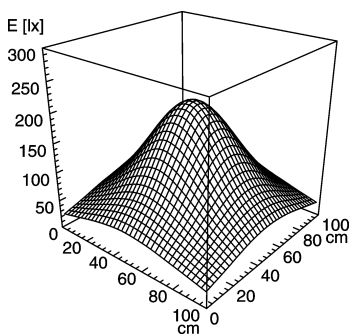

Emin: 29 lx
Em: 95 lx
Emax: 206 lx

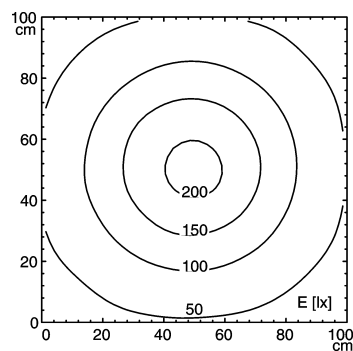

measuring conditions: d=50cm

