

SUBMITTAL SHEET

STARLINE[®] MICRO MD, MICRO/R, PIKO/R - RECESSED LUMINAIRES

CLIENT

PROJECT NAME

FIXTURE TYPE


QUANTITY




8 X MD



2 X 2 MD



MICRO/R



PIKO/R



1 X MD




2 X MD



4 X MD

ORDER CONFIGURATION

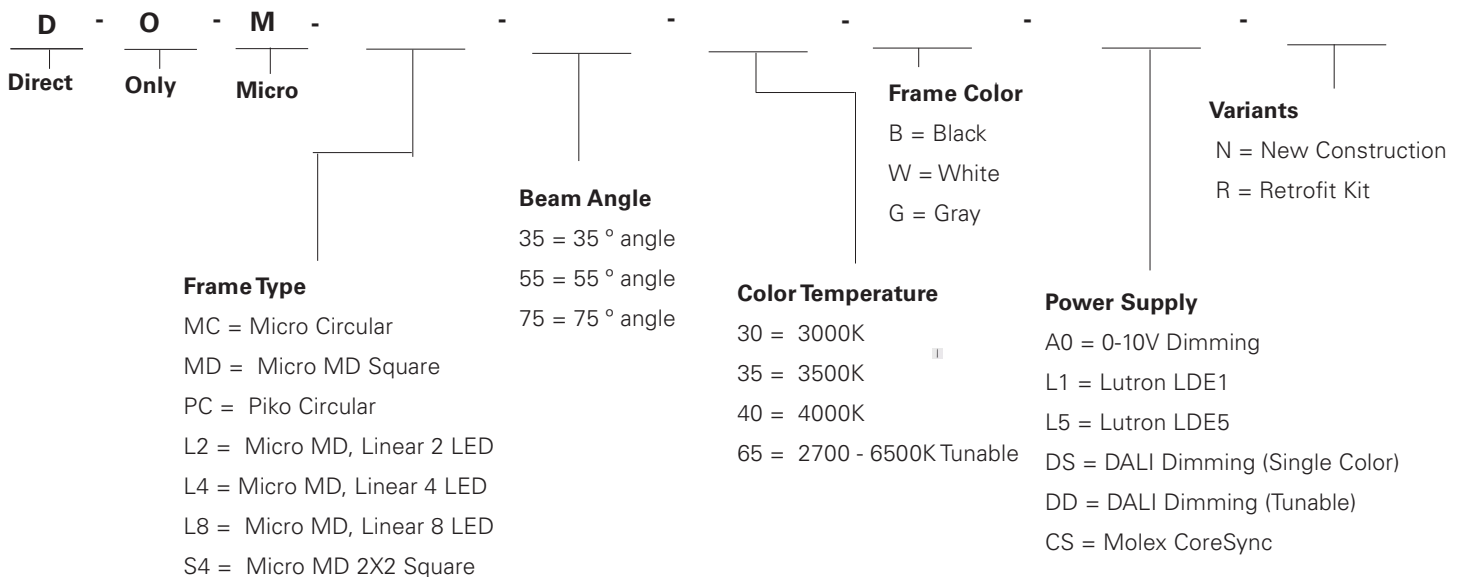

STARLINE[®] MICRO MD recessed luminaires

| | |
|-------------------------------------|--|
| Dimensions (L/W/H): | 1 x MD - 2.3in. x 2.3in. x 2.4in. 2 x 2 MD - 3.9in. x 3.9in. x 2.4in. 2 X MD - 3.9in. x 2.3in. x 2.4in. 4 x MD - 6.8in. x 2.3in. x 2.4in. 8 x MD - 13.4in. x 2.3in. x 2.4in. |
| Finish: | epoxy powder coating |
| Luminous efficacy: | 105 lm/W |
| Wattage: | 5 - 31W |
| Color temperature: | 3000K/ 3500K/ 4000K/ 2700-6500K |
| Illuminance: | 500 - 30100 lumens |
| Beam Angles: | 35° / 55° / 75° |
| Unified Glare Rating (UGR): | 35°<6 / 55°<19 / 75°<25 |
| Color Rendering Index (CRI): | CRI>80 |
| LED service life: | 50,000 hours (L70B10) |
| Remote driver and housing: | 120-227V |
| Controls: | 0-10V standard dimming |



STARLINE[®] MICRO/R

| | |
|-------------------------------------|------------------------------------|
| Dimensions (Ø/H): | 2.3in. x 3.7in. |
| Finish: | epoxy powder coating |
| Luminous efficacy: | 105lm/W |
| Wattage: | 5W |
| Color temperature: | 3000K/ 3500K/ 4000K/ 2700-6500K |
| Illuminance: | 500 lumens |
| Beam Angle: | 35° / 55° / 75° |
| Unified Glare Rating (UGR): | 35°<6 / 55°<19 / 75°<25 |
| Color Rendering Index (CRI): | CRI>80 |
| Remote driver and housing: | 120-227V |
| Controls: | 0-10V standard dimming |



STARLINE[®] PIKO/R

| | |
|-------------------------------------|------------------------|
| Dimensions (Ø/H): | 2.3in. x 3.7in. |
| Finish: | epoxy powder coating |
| Luminous efficacy: | 55lm/W |
| Wattage: | 5W |
| Color temperature: | 3500K |
| Illuminance: | 240 lumens |
| Beam Angle: | 60° |
| Unified Glare Rating (UGR): | UGR<16 |
| Color Rendering Index (CRI): | CRI>80 |
| Remote driver and housing: | 120-227V |
| Controls: | 0-10V standard dimming |

