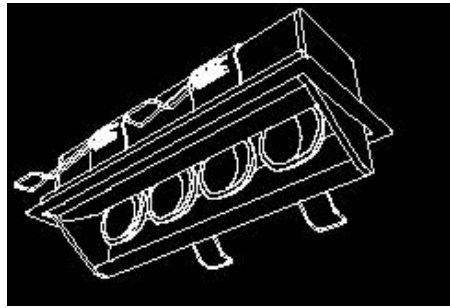

STARLINE® MICRO WW
WALL WASH LUMINAIRES



Waldmann's Micro WW wall washer luminaires feature a unique design using micro-faceted reflectors to guide light distribution onto a vertical plane. These reflectors allow for uniform illumination of the wall, top to bottom and side to side. Strong, molded aluminum housings are available in black, gray or white to use as an accent or for a more discreet look.

- Housing : aluminum with
- Finish: epoxy powder coating
- Colors: white, gray, black
- Total light power: 9- 45W
- Color temperature: 3500K
- Color rendering: (CRI) >80)
- LED life: 50000 hours (L80B10)

STARLINE® MICRO WW wall wash luminaire



MICRO WW

Specifications

| | |
|-----------------------------------|--|
| Dimensions: | 4 x WW: (7.6in. x 2.8in. x 5.0in.) 8 x WW: (14.0in. x 2.8in x 5.0in.) 12 x WW: ((20.2in. x 2.8in x 5.0in.) |
| Illuminance: | 925 - 4488 lumens |
| Wattage: | 9 - 45W |
| Beam Angle: | Wall Washing |
| Remote driver and housing: | 120-227V |
| Controls: | 0-10V standard dimming |

STARLINE® WALL WASH OPTIC



ORDER CONFIGURATOR

| | | | | | | | | | |
|----------|----------|----------|-----------|--------------|---------------------------|--------------------|----------------------------------|-----------------|------------------|
| D | O | M | WW | - | - | - | - | - | - |
| Direct | Only | Micro | Wall Wash | | | | | | |
| | | | | LEDS | | Frame Color | | Variants | Type |
| | | | | 04 = 4 LEDs | | B = Black | | 0-9 | N = New |
| | | | | 08 = 8 LEDs | | W = White | | | Construction |
| | | | | 12 = 12 LEDs | | G = Gray | | | R = Retrofit Kit |
| | | | | | Color Temperature | | Power Supply | | |
| | | | | | 30 = 3000K | | A0 = 0-10V Dimming | | |
| | | | | | 35 = 3500K | | L1 = Lutron LDE1 | | |
| | | | | | 40 = 4000K | | L5 = Lutron LDE5 | | |
| | | | | | 65 = 2700 - 6500K Tunable | | DS = DALI Dimming (Single Color) | | |
| | | | | | | | DD = DALI Dimming (Tunable) | | |
| | | | | | | | CS = Molex CoreSync | | |