

**ARCHITECTURAL LED HIGHLIGHTS**



## IDOO.line / DOTOO.line LINEAR LIGHTING SYSTEM

This architectural linear lighting system features a sleek 2.4" x 4.3" profile, ideal for any type of atrium, lobby, or office configuration. The minimalistic design blends seamlessly with surrounding decor or architecture. Direct/indirect or 100% direct LED light is generated by specially designed reflection technology. The modular interlocking system allows for flexibility in layouts - linear runs can be achieved with multiple fixtures in a series for up to 60 feet. Many length, mounting and illumination options offer a customized look to your space.

- Made from extruded aluminum with fused aluminum end caps
- Durable powder coat finish
- High efficiency clear indirect lens
- Choice of direct optics, including low UGR architectural MD optics
- Design as you choose with full line of options for patterns, recessed, or standalone solutions (consult factory)
- Standard fixtures are compatible with 0-10V lighting controls
- ETL/cETL approved



## LUM CONNECT SMART LIGHTING

LUM CONNECT, Waldmann's smart lighting control platform, provides a diverse range of functions that enable luminaires to be controlled intelligently. The luminaires become part of networked environments with simple-to-operate, standard interfaces, enhancing user convenience and energy efficiency.



With the focus on energy savings so prevalent today, Waldmann has developed the smart lighting management system, which uses presence detectors and daylight sensor systems at a whole new level.



Biodynamic light control, that mimics the changes in sunlight that occurs with the course of the day, can be implemented with Waldmann fixtures.



## IDOO.PENDANT SUSPENDED LUMINAIRE

- Extremely slim, sleek profile
- Edge lighting and light-guide technology offer a soft, even luster at the light source
- Indirect light component with batwing diffuser for wide beam light distribution
- Capability to position up to six fixtures in a continuous row or as stand alone
- Easy mounting with LED driver integrated
- ETL/cETL approved



## DOTOO.FIT RECESSED LUMINAIRE

- Recessed LED light fixture for drop ceilings
- Direct downlight with edge lighting technology
- 0-10V dimming on all models
- Compatible with DALI light management systems for timed control lighting
- ETL/cETL approved



With our PULSE TALK wireless module, luminaires talk to each other as a group using swarm control to create a much more comfortable lighting scenario and working environment.



With Power over Ethernet, Waldmann fixtures can access dimming, timing, sensors, light color, and daylight harvesting via software.



Use the LIGHT ADMIN App to integrate your Waldmann luminaires and enable management and configuration of your entire lighting installation.



## R7 ARCHITECTURAL TUBE LIGHTING


- Many lengths available for customizable application
- Dimmable or on/off switching options available
- Ambient temperature range: -4°F to 104°F
- Instant-on, full light output – no warm up time necessary
- No UV emission
- Strong, IP67-rated satine PMMA acrylic tube
- A variety of brackets and suspension devices available for both ceiling and direct wall mounting
- ETL/cETL approved



## LAVIGO

### DIRECT/INDIRECT LUMINAIRE

- Direct/indirect light for work spaces and surrounding areas
- Daylight and presence sensor technology and Pulse Talk options enable wireless communication between several luminaires
- Optimized energy consumption due to new LED technological advances
- Minimalistic form and design, timeless modular solution complements any aesthetic
- Switching and dimming conveniently located on the pole
- Available in freestanding or desk-mount and single or double light head versions
- Compatible with Waldmann's LUM CONNECT Smart Lighting
- ETL/cETL approved

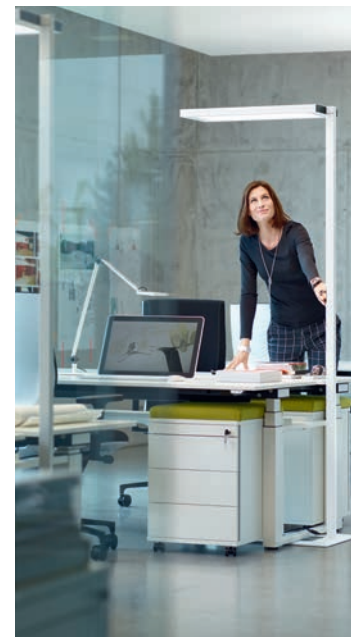



## PARA.MI

### LED TASK LIGHT

- Delivers 600 lumens with only 8 W
- Light-touch switch on head for on/off and dimming
- Programmable memory function for automatic shut-off
- Self-locking joints pivot and turn to adjust effortlessly
- No shadows or glare with specially designed reflectors
- Matching base or desk clamp mounting options available
- 3000 K or 4000 K color temperature available
- Colors white, silver, or black, and custom colors available upon request
- ETL/cETL approved

One luminaire, multiple customization options. This award-winning, ergonomic light comes in many shapes and colors that can be mixed and matched for an individual look and feel. The PARA.MI is engineered with a very minimalist design - less than ½-inch in thickness - however, still includes many great features such as a robust arm system, continuous dimming, integral memory, and glare-free optics.




## TANEO

### LED SYSTEM TASK LUMINAIRE

- Anodized aluminum housing
- Lengths – Arm 8.6", 15.7", 22.7"; Bench 14.2", 21.2"
- Spring-balanced arm or system-mounted versions
- 3D head joint for ergonomic ease of use
- Glare-free satine or clear prismatic lens
- Clip-on magnifier 3.5 diopters (1.88X) available
- Easy access to touch panel for dimming and on/off switching
- Standard color temperatures: 4000K or 5000K
- Optional tunable white (switch between 3000K, 4000K, 5000K and 6500K) or full spectrum 5000K available\*
- 50,000 hours maintenance-free operation
- 100-240V AC
- 10-foot cord and plug included
- IP20 rated
- ETL/cETL

\*Arm model only

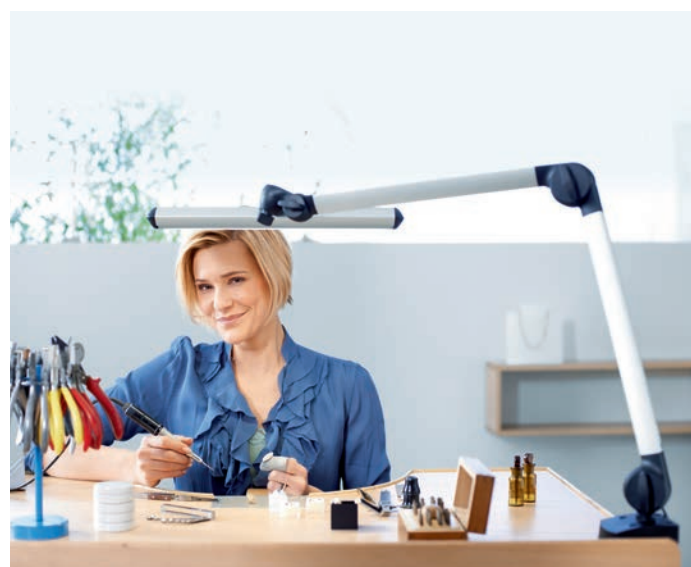

## ZERA LED BED WALL LUMINAIRE

- Slim, sleek luminaire body is only 0.8" in height
- Lumen output matches functionality: general room lighting (3750 lumens), examination light (2450 lumens), glare-free reading light (1000 lumens)
- Clear and distinct examination and treatment light offers a light intensity of 1000 lux in the exam area or 300 lux at the foot of the bed
- Color rendering index Ra > 90, ideal for bedside examinations and treatments and Ra > 80 for general room lighting
- Top-quality LED modules guarantee a long life cycle and can be exchanged when necessary
- Capacity to operate from patient bed and nurses station
- Complies with EN 60598-1, EN 60598-2-25 standards
- ETL/cETL approved



## VIVAA FACILITY & ROOM LIGHT

- Glare-free lighting with micro prism lens
- Color temperatures: 3000 K, 4000 K, 3000 K - 6500 K (when compatible with VTL system)
- Adjustable pendant style for easy customization
- 16" or 24" diameters available
- 50,000 hours of LED life
- Easy to clean and maintenance-free
- Complies with EN 60598-1, EN 60598-2-25 standards
- ETL/cETL approved

## AMADEA LED 2.0 FACILITY & ROOM LIGHT

- Extruded aluminum housing and polycarbonate covers provide durability
- Length 41"
- Color Temperatures: 3000K, 3500K or 4000K
- CRI >90
- Light distribution: direct/indirect
- Three-way switching controls indirect, direct, and reading lights
- Complies with EN 60598-1, EN 60598-2-25 standards
- ETL/cETL





## STELLAR CEILING ROOM LIGHT

- Flush-mounted for simple drop ceiling installation
- Model size options: 2' x 2' or 2' x 4'
- Optional examination and/or reading light available
- Light output: general room lighting (4000 lumens), examination light (10,300 lumens), glare-free reading light (741 lumens)
- 0-10V dimming and DALI-compatible options
- Choice of color temperatures: 3000 K, 3500 K and 4000 K
- High-impact acrylic lens - ideal for use with LEDs
- White urethane powder-coated antimicrobial finish
- 50,000 hours (L70) maintenance-free operation
- ETL/cETL approved



## STELLAR DUO CEILING ROOM LIGHT

- Flush-mounted ceiling fixture with narrow form factor specifically designed for over the bed
- 48 inches in length and 7 inches wide
- Optional examination and/or reading light available
- Choice of color temperatures: 3000 K, 3500 K and 4000 K
- Light output: general room lighting (3,200 lumens), examination lighting (3,900 lumens)
- 0-10V dimming and DALI-compatible options
- High-impact acrylic lens - ideal for use with LEDs
- White urethane powder-coat antimicrobial finish
- 50,000 hours (L70) maintenance-free LED operation
- ETL/cETL approved



## CRESCENT NIGHT LIGHT

- Available in various color temperatures: 2700 K, 3000 K, 3500 K, blue and amber
- 4.5 inches high by 2.75 inches in width
- Minimum protrusion from wall to ensure patient/staff safety
- 100,000 hours (L70) maintenance-free LED operation
- Soft, comforting light output of only 33 lumens
- Powder-coated die-cast aluminum faceplate with antimicrobial finish
- Frosted lens is UV stabilized, high impact-resistant polycarbonate
- Optional light sensor will turn night light on automatically in low ambient light
- ETL/cETL approved



## NAVIGATOR MULTI-FUNCTION DIMMING CONTROLLER

- Controls up to five light functions in the patient room
- Keypads are low voltage for patient safety
- Compact design fits into a single gang opening

- Mylar overlay for ease of cleaning and infection control
- Compatible with all manufactured nurse call products
- Universal input voltage of 120 – 277 volts
- 0 - 10V dimming capability when used with dimming driver ballasts

HEADQUARTERS GERMANY  
Herbert Waldmann GmbH & Co. KG  
Peter - Henlein - Straße 5  
78056 VILLINGEN-SCHWENNINGEN  
GERMANY  
Telephone + 49 7720 601 - 0  
Telephone + 49 7720 601 - 200 (Sales)  
Fax + 49 7720 601 - 290  
www.waldmann.com  
sales.germany@waldmann.com

AUSTRIA  
Waldmann Lichttechnik Ges.m.b.H.  
Gewerbepark Wagram 7  
4061 PASCHING / LINZ  
AUSTRIA  
Telephone + 43 7229 67400  
Fax + 43 7229 67444  
www.waldmann.com  
info-at@waldmann.com

CHINA  
Waldmann Lighting (Shanghai) Co., Ltd.  
Part A11a, No. Five Normative Workshop  
199 Changjian Road, Baoshan  
SHANGHAI, P.R.C. 200949  
CHINA  
Telephone + 86 21 5169 1799  
Fax + 86 21 3385 0032  
www.waldmann.com.cn  
info-cn@waldmann.com

FRANCE  
Waldmann Eclairage S.A.S.  
Zone Industrielle  
Rue de l'Embranchement  
67116 REICHSTETT  
FRANCE  
Telephone + 33 3 88 20 95 88  
Fax + 33 3 88 20 95 68  
www.waldmann.com  
info-fr@waldmann.com

ITALY  
Waldmann Illuminotecnica S.r.l.  
Via della Pace, 18 A  
20098 SAN GIULIANO MILANESE (MI)  
ITALY  
Telephone + 39 02 98 24 90 24  
Fax + 39 02 98 24 63 78  
www.waldmann.com  
info-it@waldmann.com

THE NETHERLANDS  
Waldmann B.V.  
Lingewei 19  
4004 LK TIEL  
THE NETHERLANDS  
Telephone + 31 344 631019  
Fax + 31 344 627856  
www.waldmann.com  
info-nl@waldmann.com

SCANDINAVIA  
Waldmann Ljusteknik AB  
Botvid Business Center  
Fågelviksvägen 9  
SE-145 53 Norsborg  
SWEDEN  
Telephone + 46 8 990 350  
Fax + 46 8 991 609  
www.waldmann.com  
info-se@waldmann.com

SINGAPORE  
Waldmann Lighting Singapore Pte. Ltd.  
77A Neil Road  
SINGAPORE 088903  
SINGAPORE  
Telephone + 65 6275 8300  
Fax + 65 6275 8377  
www.waldmann.com  
sales-sg@waldmann.com

SWITZERLAND  
Waldmann Lichttechnik GmbH  
Benkenstrasse 57  
5024 KÜTTIGEN  
SWITZERLAND  
Telephone + 41 62 839 1212  
Fax + 41 62 839 1299  
www.waldmann.com  
info-ch@waldmann.com

USA  
Waldmann Lighting Company  
9 Century Drive  
WHEELING, ILLINOIS 60090  
USA  
Telephone + 1 847 520 1060  
Fax + 1 847 520 1730  
www.waldmannlighting.com  
waldmann@waldmannlighting.com

