

light strip

#112544007-00011085




SLIM LED - LIQ 24




connected load  
 fitted with  
 work equipment  
 mains lead  
 design  
 luminaire body  
 material  
 surface  
 weight (net)  
 fastening  
 power consumption  
 usage  
 lamp cover  
 system of protection  
 class of protection  
 colour luminaire body  
 total length  
 special features  
 max ambient temperature

22-29 V; DC  
 24 x Light-emitting diode  
 without  
 approx. 3.0 m (10 ft) ; with free stranded wires  
 mounted version  
  
 aluminium/plastic  
 anodised  
 approx. 0,6 kg  
 screws  
 approx. 15 W  
 without switch  
 Acrylic satine  
 IP 67  
 III  
 aluminium colored anodised  
 616 mm (24.3")  
 direction of beam +/- 45° adjustable  
 25C (77F)

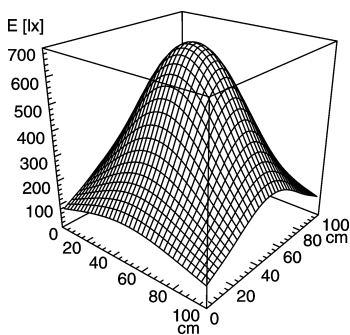

E<sub>min</sub>: 100 lx  
 E<sub>m</sub>: 336 lx  
 E<sub>max</sub>: 691 lx

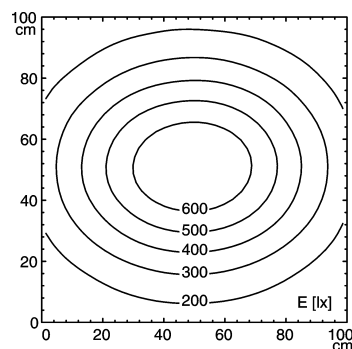

measuring conditions: d=50cm

