

light strip

#112545000-00001351




connected load
 fitted with
 work equipment
 mains lead
 design
 luminaire body
 material
 surface
 weight (net)
 fastening
 power consumption
 usage
 lamp cover
 system of protection
 class of protection
 color luminaire body
 total length
 max ambient temperature


22-29V DC
 6 x Light-emitting diode
 without
 approx. 3.0 m (10 ft) ; with free stranded wires
 mounted version

 aluminum/plastic
 anodized
 approx. 0,2 kg
 screws
 approx. 4 W
 without switch
 acrylic clear
 IP67
 III
 aluminum colored anodi zed
 196 mm (7.7")
 25C (77F)

SLIM LED - LIQ 6

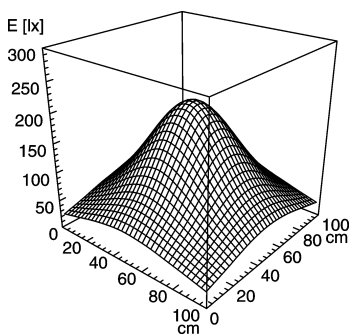

Emin: 29 lx
 Em: 95 lx
 Emax: 206 lx

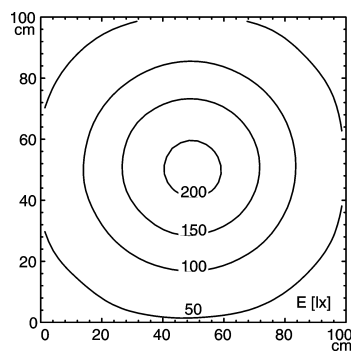

measuring conditions: d=50cm

