



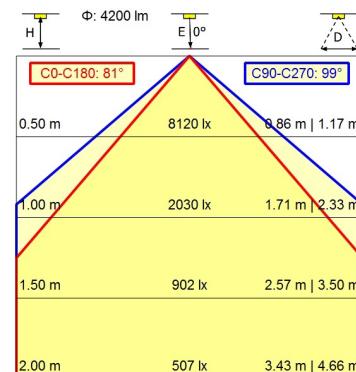

light distribution

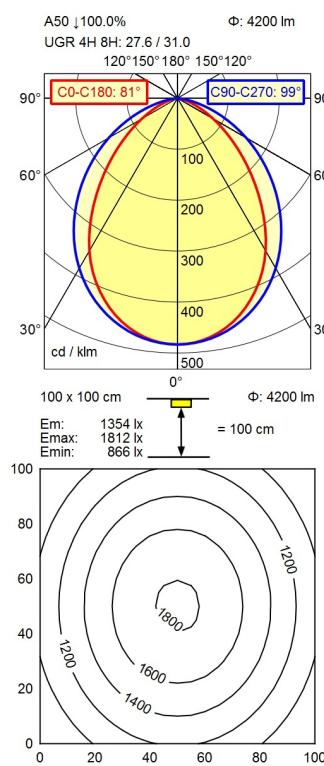

light source	LED
work equipment	without
connected load	24 V, DC
power consumption	approx. 37 W
luminous flux	approx. 4,200 lm
luminous efficiency	approx. 113 lm/W
light distribution	direct, wide-angled beam
beam angle	90°
color temperature	cold white
color temperature	approx. 5,000 K
color rendering index (CRI)	≥ 80
chromaticity tolerance LED	< 4 SDCM
glare control	without
luminance (L65)	≤ 87,000 cd/m <sup>2</sup>
unified glare rating (4H 8H)	> 28
system of protection	IP 67
class of protection	III
technology	switchable
operation	external
housing	aluminum; anodized; aluminum colored; anodized
cover	screen, clear
weight (net)	approx. 1.1 kg (2.4 lbs)
mains lead	built-in plug
design	mounted version
fastening	L-angle; clamp
dimension	A=715 mm (28.15 in)
ambient temperature range	0 °C - 50 °C
special features	high output