



fitted with	LED
work equipment	without
connected load	24 V, DC
power consumption	approx. 2.8 W
luminous flux	approx. 252 lm
luminous efficiency	approx. 90 lm/W
light distribution	direct
light color	neutral white, approx. 5000K
color rendering index (CRI)	> 90
system of protection	IP 54
class of protection	III
usage	in-line switch
luminaire body	anodized aluminum
luminaire cover	clear acrylic
weight (net)	approx. 0.2 kg (0.44 lbs)
mains supply	approx. 3.0 m (10 ft); to M12 connector approx. 5.0 m (16.5 ft); free stranded wires
design	mounted version
fastening	screws
dimension	A = 196 mm, 7.72 in
light opening	C = 150 mm, 5.91 in
outside diameter	23 mm, 0.9 in
special features	direction of beam +/- 45° adjustable
total length	196 mm (7.72")
max ambient temperature	25°C (77°F)

light distribution

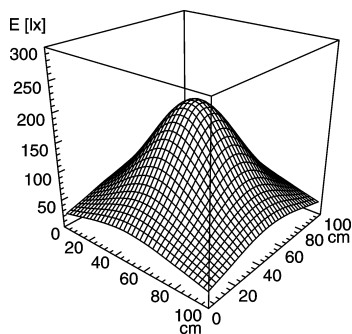

E_{min}: 29 lx
E_m: 95 lx
E_{max}: 206 lx



measuring conditions: d=50cm

