



<p>fitted with work equipment connected load power consumption luminous flux luminous efficiency light distribution light color color rendering index (CRI) system of protection class of protection usage luminaire body luminaire cover weight (net) mains supply</p> <p>design fastening dimension light opening outside diameter special features total length max ambient temperature</p>	<p>LED without 120 V approx. 2.8 W approx. 252 lm approx. 90 lm/W direct neutral white, approx. 5000K > 90 IP 54 III in-line switch anodized aluminum acrylic satine approx. 0.2 kg (0.44 lbs) approx. 3.0 m (10 ft); to M12 connector approx. 3.0 m (10 ft); to NEMA 1-15P plug mounted version screws A = 196 mm, 7.72 in C = 150 mm, 5.91 in 23 mm, 0.9 in direction of beam +/- 45° adjustable 196 mm (7.72") 25°C (77°F)</p>
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

light distribution

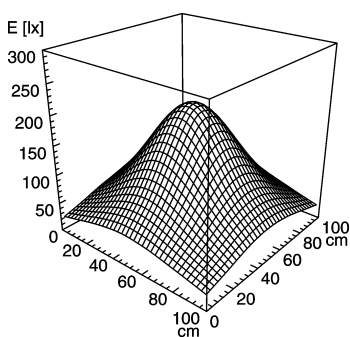

E_{min}: 29 lx
E_m: 95 lx
E_{max}: 206 lx

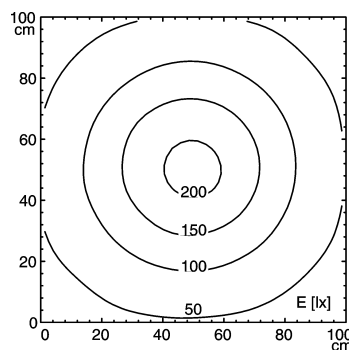

measuring conditions: d=50cm

