



fitted with	LED
work equipment	without
connected load	120 V
power consumption	approx. 5.6 W
luminous flux	approx. 504 lm
luminous efficiency	approx. 90 lm/W
light distribution	direct
light color	neutral white, approx. 5000K
color rendering index (CRI)	> 90
system of protection	IP 54
class of protection	III
usage	in-line switch
luminaire body	anodized aluminum
luminaire cover	acrylic satine
weight (net)	approx. 0.4 kg (0.88 lbs)
mains supply	approx. 3.0 m (10 ft); to M12 connector approx. 3.0 m (10 ft); to NEMA 1-15P plug
design	mounted version
fastening	screws
dimension	A = 336 mm, 13.23 in
light opening	C = 290 mm, 11.42 in
outside diameter	23 mm, 0.9 in
special features	direction of beam +/- 45° adjustable
total length	336 mm (13.23")
max ambient temperature	25°C (77°F)

light distribution

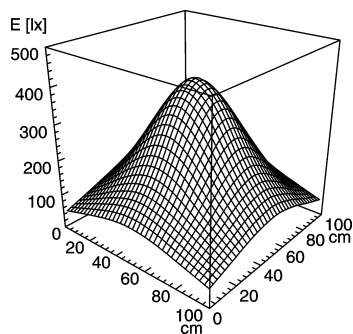

E_{min}: 58 lx
E_m: 184 lx
E_{max}: 401 lx

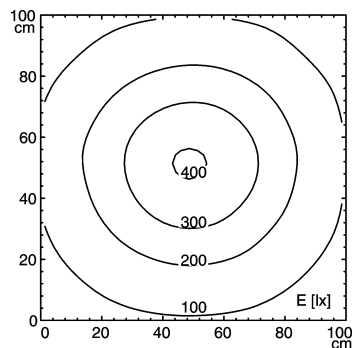

measuring conditions: d=50cm

