



fitted with	LED
work equipment	without
connected load	24 V, DC
power consumption	approx. 11.2 W
luminous flux	approx. 1008 lm
luminous efficiency	approx. 90 lm/W
light distribution	direct
light color	neutral white, approx. 5000K
color rendering index (CRI)	> 90
system of protection	IP 54
class of protection	III
usage	without switch
luminaire body	anodized aluminum
luminaire cover	acrylic satine
weight (net)	approx. 0.7 kg (1.54 lbs)
mains supply	approx. 3.0 m (10 ft); free stranded wires
design	mounted version
fastening	screws
dimension	A = 616 mm, 24.25 in
light opening	C = 570 mm, 22.44 in
outside diameter	23 mm, 0.9 in
special features	direction of beam +/- 45° adjustable
total length	616 mm (24.25")
max ambient temperature	25°C (77°F)

light distribution

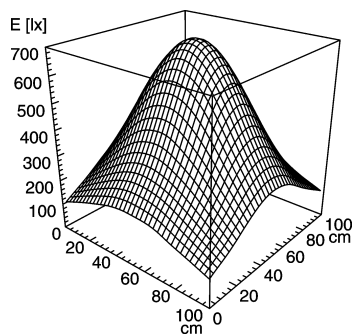

E<sub>min</sub>: 125 lx  
E<sub>m</sub>: 360 lx  
E<sub>max</sub>: 699 lx

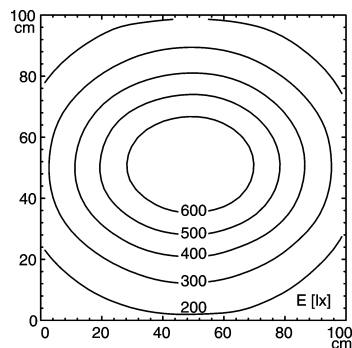

measuring conditions: d=50cm

