



fitted with	LED
work equipment	without
connected load	120 V
power consumption	approx. 16.8 W
luminous flux	approx. 1512 lm
luminous efficiency	approx. 90 lm/W
light distribution	direct
light color	neutral white, approx. 5000K
color rendering index (CRI)	> 90
system of protection	IP 54
class of protection	III
usage	in-line switch
luminaire body	anodized aluminum
luminaire cover	clear acrylic
weight (net)	approx. 0.8 kg (1.76 lbs)
mains supply	approx. 3.0 m (10 ft); to M12 connector approx. 3.0 m (10 ft); to NEMA 1-15P plug
design	mounted version
fastening	screws
dimension	A = 896 mm, 35.28 in
light opening	C = 850 mm, 33.46 in
outside diameter	23 mm, 0.9 in
special features	direction of beam +/- 45° adjustable
total length	896 mm (35.28")
max ambient temperature	25°C (77°F)

light distribution

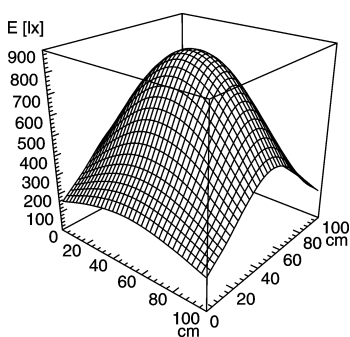

E<sub>min</sub>: 190 lx  
E<sub>m</sub>: 491 lx  
E<sub>max</sub>: 872 lx

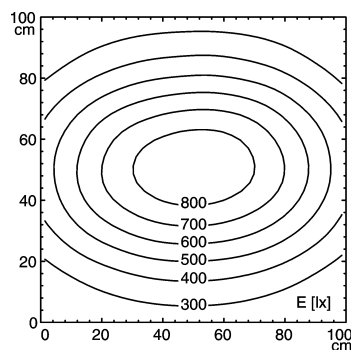

measuring conditions: d=50cm

