



fitted with	LED
work equipment	without
connected load	120 V
power consumption	approx. 22.4 W
luminous flux	approx. 2016 lm
luminous efficiency	approx. 90 lm/W
light distribution	direct
light color	neutral white, approx. 5000K
color rendering index (CRI)	> 90
system of protection	IP 54
class of protection	III
usage	in-line switch
luminaire body	anodized aluminum
luminaire cover	acrylic satine
weight (net)	approx. 1.0 kg (2.20 lbs)
mains supply	approx. 3.0 m (10 ft); to M12 connector approx. 3.0 m (10 ft); to NEMA 1-15P plug
design	mounted version
fastening	screws
dimension	A = 1176 mm, 46.30 in
light opening	C = 1130 mm, 44.49 in
outside diameter	23 mm, 0.9 in
special features	direction of beam +/- 45° adjustable
total length	1176 mm (46.30")
max ambient temperature	25°C (77°F)

light distribution

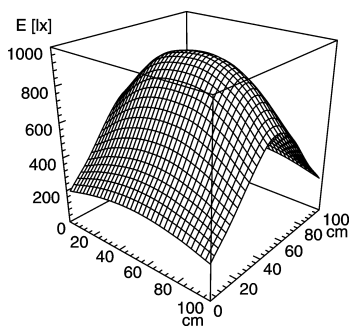

E<sub>min</sub>: 240 lx  
E<sub>m</sub>: 578 lx  
E<sub>max</sub>: 946 lx

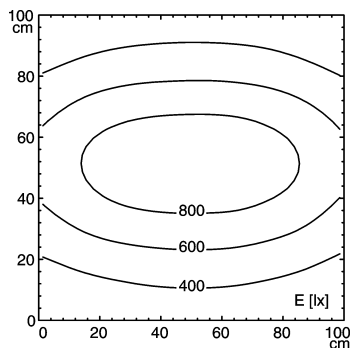

measuring conditions: d=50cm

