


fitted with
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light distribution
light color
system of protection
class of protection
usage
luminaire body
luminaire cover
weight (net)
mains supply


design
fastening
dimension
light opening
outside diameter
special features
total length
max ambient temperature

LED
without
120 V
approx. 2.8 W
approx. 46.5 lm
approx. 16.6 lm/W
direct
amber, 590nm
IP 54
III
in-line switch
anodized aluminum
clear acrylic
approx. 0.2 kg (0.44 lbs)
approx. 3.0 m (10 ft); to M12 connector
approx. 3.0 m (10 ft); to NEMA 1-15P plug
mounted version
screws
A = 196 mm, 7.72 in
C = 150 mm, 5.91 in
23 mm, 0.9 in
direction of beam +/- 45° adjustable
196 mm (7.72")
25°C (77°F)

light distribution

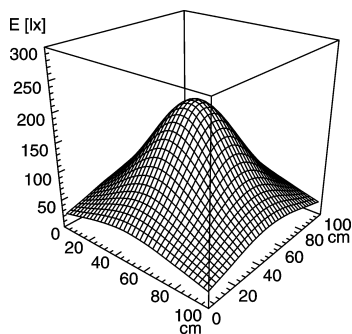

E_{min}: 29 lx
E_m: 95 lx
E_{max}: 206 lx



measuring conditions: d=50cm

