



fitted with  
work equipment  
connected load  
power consumption  
luminous flux  
luminous efficiency  
light distribution  
light color  
system of protection  
class of protection  
usage  
luminaire body  
luminaire cover  
weight (net)  
mains supply  
  
design  
fastening  
dimension  
light opening  
outside diameter  
special features  
total length  
max ambient temperature

LED  
without  
24 V, DC  
approx. 5.6 W  
approx. 93 lm  
approx. 16.6 lm/W  
direct  
amber, 590nm  
IP 54  
III  
in-line switch  
anodized aluminum  
clear acrylic  
approx. 0.4 kg (0.88 lbs)  
approx. 3.0 m (10 ft); to M12 connector  
approx. 5.0 m (16.5 ft); free stranded wires  
mounted version  
screws  
A = 336 mm, 13.23 in  
C = 290 mm, 11.42 in  
23 mm, 0.9 in  
direction of beam +/- 45° adjustable  
336 mm (13.23")  
25°C (77°F)

light distribution

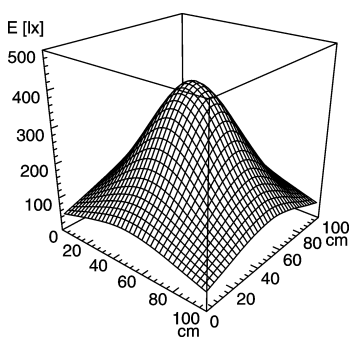

Emin: 58 lx  
Em: 184 lx  
Emax: 401 lx

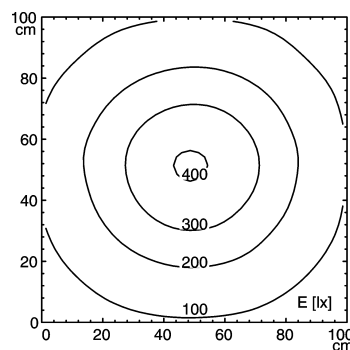

measuring conditions: d=50cm

