


fitted with
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light distribution
light color
system of protection
class of protection
usage
luminaire body
luminaire cover
weight (net)
mains supply


design
fastening
dimension
light opening
outside diameter
special features
total length
max ambient temperature

LED
without
120 V
approx. 11.2 W
approx. 186 lm
approx. 16.6 lm/W
direct
amber, 590nm
IP 54
III
in-line switch
anodized aluminum
clear acrylic
approx. 0.7 kg (1.54 lbs)
approx. 3.0 m (10 ft); to M12 connector
approx. 3.0 m (10 ft); to NEMA 1-15P plug
mounted version
screws
A = 616 mm, 24.25 in
C = 570 mm, 22.44 in
23 mm, 0.9 in
direction of beam +/- 45° adjustable
616 mm (24.25")
25°C (77°F)

light distribution

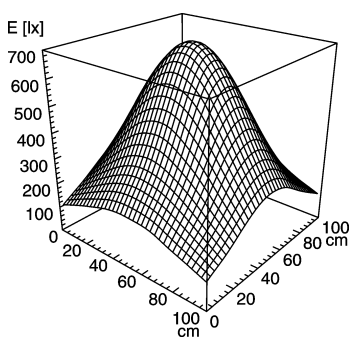

E_{min}: 125 lx
E_m: 360 lx
E_{max}: 699 lx

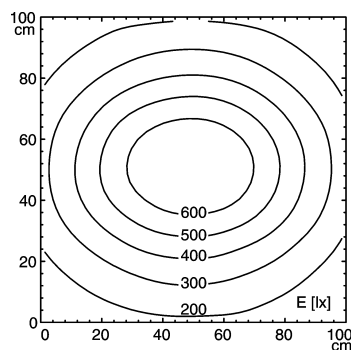

measuring conditions: d=50cm

