



fitted with  
work equipment  
connected load  
power consumption  
luminous flux  
luminous efficiency  
light distribution  
light color  
system of protection  
class of protection  
usage  
luminaire body  
luminaire cover  
weight (net)  
mains supply  
design  
fastening  
dimension  
light opening  
outside diameter  
special features  
total length  
max ambient temperature

LED  
without  
24 V, DC  
approx. 22.4 W  
approx. 372 lm  
approx. 16.6 lm/W  
direct  
amber, 590nm  
IP 54  
III  
without switch  
anodized aluminum  
clear acrylic  
approx. 1.0 kg (2.20 lbs)  
approx. 3.0 m (10 ft); free stranded wires  
mounted version  
screws  
A = 1176 mm, 46.30 in  
C = 1130 mm, 44.49 in  
23 mm, 0.9 in  
direction of beam +/- 45° adjustable  
1176 mm (46.30")  
25°C (77°F)

light distribution

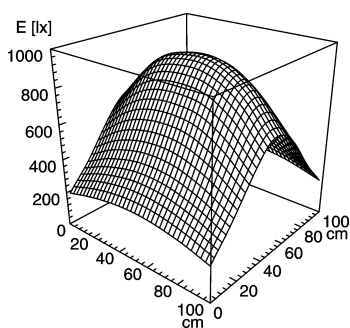

Emin: 240 lx  
Em: 578 lx  
Emax: 946 lx

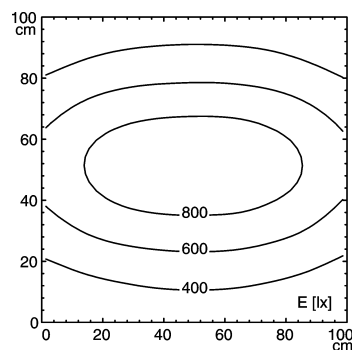

measuring conditions: d=50cm

