



**fitted with**

18 x LED  
neutral white, 4600-5400 K  
Color Rendering Index (CRI)=85  
without  
18-30 V; DC  
approx. 7.5 W  
IP 67  
III

**work equipment**  
**connected load**  
**power consumption**  
**system of protection**  
**class of protection**  
**technology**

without switch

**usage**  
**luminaire body**  
**material**

anodized aluminum  
screen, clear  
approx. 4.18lb (1.9 kg)

**lamp cover**  
**weight (net)**  
**mains supply**

built-in plug  
M12 Series 713  
mounted version  
L-angle, clamp  
A=22.24" (565 mm)

**design**  
**fastening**  
**dimension**  
**special features**

Eco equipment




M12

**illuminance**

measuring conditions: d=100cm

**Em:** 273 lx  
**Emax:** 354 lx  
**Emin:** 169 lx

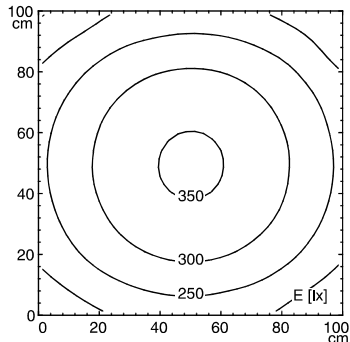

**luminous intensity**

