

## MULTIPURPOSE STRIP LIGHT SLIM LED 2.0



SLIM LED 2.0 is an affordable LED lighting solution ideal for areas where space is limited. With a small form factor and a mere 1-inch in diameter, it is available in an adjustable configuration. The adjustable model movement is upwards or downwards out of center

position approximately 24°. SLIM LED 2.0 is encapsulated and therefore maintenance-free. It is available with free strand ends for connection to safety extra low voltage (SELV). For easy ordering, two bundle options are available. including in line switch, M12

cord or transformer. With a protection rating of IP54, the Slim LED 2.0 is fully protected against solid objects and splashing of water from any angle and although not dust tight it does offer significant protection from dust.

- Minimal installation dimensions
- Standard Voltage: 24VDC
- Two bundle options available: 24VDC or 120VAC
- 5000K color temperature or Amber, 590NM
- Satine and clear lens configurations

- 50,000 hours of optimum light due to latest LED technology
- Impact and vibration resistant
- Lighting direction individually adjustable
- Lengths of 7.7 to 46 inches available
- IP54 rated


\*Not suitable for environments where coolants or lubricants are present

### Bundle options make ordering easy!

SLIM LED 2.0 has two bundle options available.



**Bundle 120V** includes M12 Cord, In-line switch, 120-24V Transformer, NEMA 1-15P

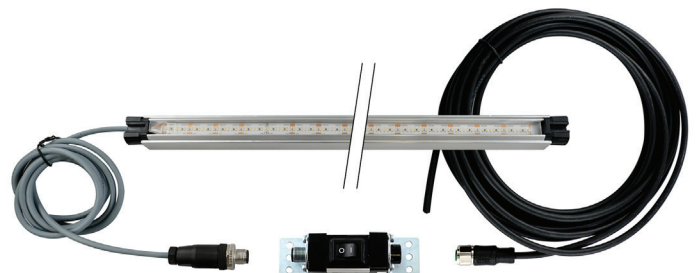

**Bundle 24V** includes M12 Cord and In-line switch

PART NO	MODEL	LENGTH	LENS TYPE	WATTAGE	LUMENS	COLOR	CONFIGURATION
SLM501000	SLM-C 7	7.72"	Clear	2.8W	252	5000K	Standard - 24V
SLM502000	SLM-C 13	13.23"	Clear	5.6W	504	5000K	Standard - 24V
SLM503000	SLM-C 24	24.25"	Clear	11.2W	1008	5000K	Standard - 24V
SLM504000	SLM-C 35	35.28"	Clear	16.8W	1512	5000K	Standard - 24V
SLM505000	SLM-C 46	46.30"	Clear	22.4W	2016	5000K	Standard - 24V
SLM501001	SLM-S 7	7.72"	Satine	2.8W	252	5000K	Standard - 24V
SLM502001	SLM-S 13	13.23"	Satine	5.6W	504	5000K	Standard - 24V
SLM503001	SLM-S 24	24.25"	Satine	11.2W	1008	5000K	Standard - 24V
SLM504001	SLM-S 35	35.28"	Satine	16.8W	1512	5000K	Standard - 24V
SLM505001	SLM-S 46	46.30"	Satine	22.4W	2016	5000K	Standard - 24V
SLMAM1000	SLM-C 7	7.72"	Clear	2.8W	45	Amber, 590NM	Standard - 24V
SLMAM2000	SLM-C 13	13.23"	Clear	5.6W	90	Amber, 590NM	Standard - 24V
SLMAM3000	SLM-C 24	24.25"	Clear	11.2W	179	Amber, 590NM	Standard - 24V
SLMAM4000	SLM-C 35	35.28"	Clear	16.8W	269	Amber, 590NM	Standard - 24V
SLMAM5000	SLM-C 46	46.30"	Clear	22.4W	358	Amber, 590NM	Standard - 24V
SLM501SW0-120	SLM-C 7	7.72"	Clear	2.8W	252	5000K	Bundle 120V
SLM502SW0-120	SLM-C 13	13.23"	Clear	5.6W	504	5000K	Bundle 120V
SLM503SW0-120	SLM-C 24	24.25"	Clear	11.2W	1008	5000K	Bundle 120V
SLM504SW0-120	SLM-C 35	35.28"	Clear	16.8W	1512	5000K	Bundle 120V
SLM505SW0-120	SLM-C 46	46.30"	Clear	22.4W	2016	5000K	Bundle 120V
SLM501SW1-120	SLM-S 7	7.72"	Satine	2.8W	252	5000K	Bundle 120V
SLM502SW1-120	SLM-S 13	13.23"	Satine	5.6W	504	5000K	Bundle 120V
SLM503SW1-120	SLM-S 24	24.25"	Satine	11.2W	1008	5000K	Bundle 120V
SLM504SW1-120	SLM-S 35	35.28"	Satine	16.8W	1512	5000K	Bundle 120V
SLM505SW1-120	SLM-S 46	46.30"	Satine	22.4W	2016	5000K	Bundle 120V
SLMAM1SW0-120	SLM-C 7	7.72"	Clear	2.8W	45	Amber, 590NM	Bundle 120V
SLMAM2SW0-120	SLM-C 13	13.23"	Clear	5.6W	90	Amber, 590NM	Bundle 120V
SLMAM3SW0-120	SLM-C 24	24.25"	Clear	11.2W	179	Amber, 590NM	Bundle 120V
SLMAM4SW0-120	SLM-C 35	35.28"	Clear	16.8W	269	Amber, 590NM	Bundle 120V
SLMAM5SW0-120	SLM-C 46	46.30"	Clear	22.4W	358	Amber, 590NM	Bundle 120V
SLM501SW0-24	SLM-C 7	7.72"	Clear	2.8W	252	5000K	Bundle 24V
SLM502SW0-24	SLM-C 13	13.23"	Clear	5.6W	504	5000K	Bundle 24V
SLM503SW0-24	SLM-C 24	24.25"	Clear	11.2W	1008	5000K	Bundle 24V
SLM504SW0-24	SLM-C 35	35.28"	Clear	16.8W	1512	5000K	Bundle 24V
SLM505SW0-24	SLM-C 46	46.30"	Clear	22.4W	2016	5000K	Bundle 24V
SLM501SW1-24	SLM-S 7	7.72"	Satine	2.8W	252	5000K	Bundle 24V
SLM502SW1-24	SLM-S 13	13.23"	Satine	5.6W	504	5000K	Bundle 24V
SLM503SW1-24	SLM-S 24	24.25"	Satine	11.2W	1008	5000K	Bundle 24V
SLM504SW1-24	SLM-S 35	35.28"	Satine	16.8W	1512	5000K	Bundle 24V
SLM505SW1-24	SLM-S 46	46.30"	Satine	22.4W	2016	5000K	Bundle 24V
SLMAM1SW0-24	SLM-C 7	7.72"	Clear	2.8W	45	Amber, 590NM	Bundle 24V
SLMAM2SW0-24	SLM-C 13	13.23"	Clear	5.6W	90	Amber, 590NM	Bundle 24V
SLMAM3SW0-24	SLM-C 24	24.25"	Clear	11.2W	179	Amber, 590NM	Bundle 24V
SLMAM4SW0-24	SLM-C 35	35.28"	Clear	16.8W	269	Amber, 590NM	Bundle 24V
SLMAM5SW0-24	SLM-C 46	46.30"	Clear	22.4W	358	Amber, 590NM	Bundle 24V

**Waldmann Lighting Company**

9 W. Century Drive  
 Wheeling, Illinois 60090  
 www.waldmannlighting.com

389.043024

Telephone (847) 520 1060  
 Fax (847) 520 1730  
 waldmann@waldmannlighting.com

