

## ARCHITECTURAL TUBULAR LIGHTING

### DESIGN SIMPLICITY AND FLEXIBILITY NOW AVAILABLE WITH LED

#### LED features at a glance


- Even light distribution with 360° illumination
- Dimmable options available
- 850 - 2000 lumen output
- Tolerates ambient temperature range of -4°F to 104°F
- No UV emission
- No warm up time, instant-on, full light output



# R7X TECHNICAL DATA


## R7X features at a glance

- Various lengths to choose from
- IP67 rated for wet conditions
- Satine finish PMMA acrylic
- Brackets and suspension devices available for ceiling or direct wall mounting
- 120-277V, 50/60Hz, 347V
- Dimming option available
- Surface, horizontal or vertical pendant mounting available
- 360° illumination
- Daisy-chaining for horizontal linear runs
- ETL/cETL approved

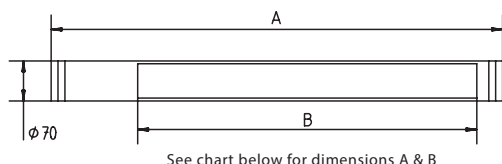

### Pendant Ring Bracket

Ring: Anodized Aluminum  
Wire: Stainless Steel  
Part # 190173039-00071017




### Surface Ring Bracket

Ring: Anodized Aluminum  
Screw: Stainless Steel  
Part # 190175019-00092090



### Pendant Strap Bracket

Strap: Stainless Steel  
Wire: Stainless Steel  
Part # 190178029-00071035



### Surface Strap Bracket

Strap: Stainless Steel  
Part # 190147019-00073787



### Vertical Pendant Bracket

Bracket: Anodized Aluminum  
Wire: Stainless Steel  
Part # 190204029-00463171

PART #	TUBE	LIGHT OPENING / FIXTURE LENGTH	LUMENS	BALLAST	POWER CONSUMPTION
R7X2LORRS	Satine	21" / 30.6"	850 lm	Remote	10W
R7X3LORRS	Satine	32.8" / 42.4"	1275 lm	Remote	15W
R7X4LORRS	Satine	44.6" / 54.2"	2000 lm	Remote	20W
R7X2LESUS	Satine	21" / 40.7"	850 lm	Internal	10W
R7X3LESUS	Satine	32.8" / 52.5"	1275 lm	Internal	15W
R7X4LESUS	Satine	44.6" / 64.3"	2000 lm	Internal	20W

## Waldmann Lighting Company

9 Century Drive  
Wheeling, Illinois 60090  
www.waldmannlighting.com

Telephone (847) 520 1060  
Fax (847) 520 1730  
waldmann@waldmannlighting.com



ENGINEERS OF LIGHT