

ARCHITECTURAL TUBULAR LIGHTING
DESIGN SIMPLICITY AND FLEXIBILITY NOW AVAILABLE WITH LED

LED features at a glance



- Supports instant, rapid, programmable start electronic ballasts
- Dimmable
- Utilizes existing fluorescent ballast as driver, with no additional power loss
- Input Voltage: same as ballast in use, usually 120-277V, 347V, 50/60Hz
- Ambient temperature range: -4°F to 104°F
- Beam angle of 300° produces even light distribution, similar to fluorescent tubes
- No UV emission
- No warm up time, instant-on, full light output



RL70X TECHNICAL DATA


RL70X features at a glance

- Various lengths
- IP67 rated for wet conditions
- Satine finish PMMA acrylic
- Available in LED or fluorescent lamp
- T8 lamps available in 17W, 25W, and 32W; LED 10W, 15W, or 20W
- Brackets and suspension devices are available for ceiling or direct wall mounting
- 120-277V, 50/60Hz, 347V
- Integrated or Remote Ballast: Standard Electronic or Optional Dimming
- Surface, horizontal or vertical pendant mounting available
- 360° illumination
- Daisy-chaining for horizontal linear runs
- ETL/cETL approved

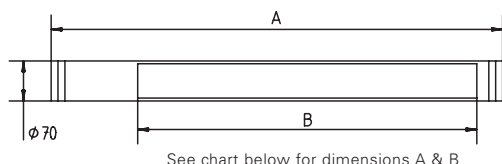


Pendant Ring Bracket

Ring: Anodized Aluminum
Wire: Stainless Steel
Part # 190173039-00071017



Surface Ring Bracket

Ring: Anodized Aluminum
Screw: Stainless Steel
Part # 190175019-00092090



Pendant Strap Bracket

Strap: Stainless Steel
Wire: Stainless Steel
Part # 190178029-00071035



Surface Strap Bracket

Strap: Stainless Steel
Surface Mount: Stainless Steel
Part # 190147019-00073787



Vertical Pendant Bracket

Bracket: Anodized Aluminum
Wire: Stainless Steel
Part # 190204029-00463171

| MODEL | PART # | TUBE | LIGHT OPENING / FIXTURE LENGTH | LUMENS | BALLAST | CONSUMPTION |
|------------|-------------|--------|--------------------------------|---------|----------|-------------|
| RL70-2L SX | R7X-2L0-RRS | Satine | 21" / 30.6" | 850 lm | Remote | 10W |
| RL70-3L SX | R7X-3L0-RRS | Satine | 32.8" / 42.4" | 1275 lm | Remote | 15W |
| RL70-4L SX | R7X-4L0-RRS | Satine | 44.6" / 54.2" | 2000 lm | Remote | 20W |
| RL70E-2L X | R7X-2LE-SUS | Satine | 21" / 40.7" | 850 lm | Internal | 10W |
| RL70E-3L X | R7X-3LE-SUS | Satine | 32.8" / 52.5" | 1275 lm | Internal | 15W |
| RL70E-4L X | R7X-4LE-SUS | Satine | 44.6" / 64.3" | 2000 lm | Internal | 20W |

Waldmann Lighting Company

9 W. Century Drive
Wheeling, Illinois 60090
www.waldmannlighting.com

Telephone (847) 520 1060
Fax (847) 520 1730
waldmann@waldmannlighting.com

Waldmann 
ENGINEER OF LIGHT.