

SLIM LED

COMPACT LINEAR LED LIGHT



FEATURES:

- Small, compact linear housing less than 1 inch (22mm) wide
- Five lengths and light output options
- Adjustable housing version rotates 45°
- Aluminum extruded housing
- Impact and vibration resistant
- 50,000 hours maintenance-free operation

SPECIFICATIONS:


Voltage	24V DC
Lamping	LED
Color Temperature	5400K
Beam Angles	adjustable beam direction +/- 45°
Luminaire Material	anodized aluminum
Lens Material	acrylic: clear, satine or no lens
Dimension	varied lengths, less than 1" wide
Protection Rating	IP67
Cord/Plug	10' cord with free stranded wires
Mounting	adjustable or fixed housing
Certification	CE, ETL/cETL approved
Accessories	See page 68

NOTE: NOT FOR USE WITH COOLANTS OR LUBRICANTS

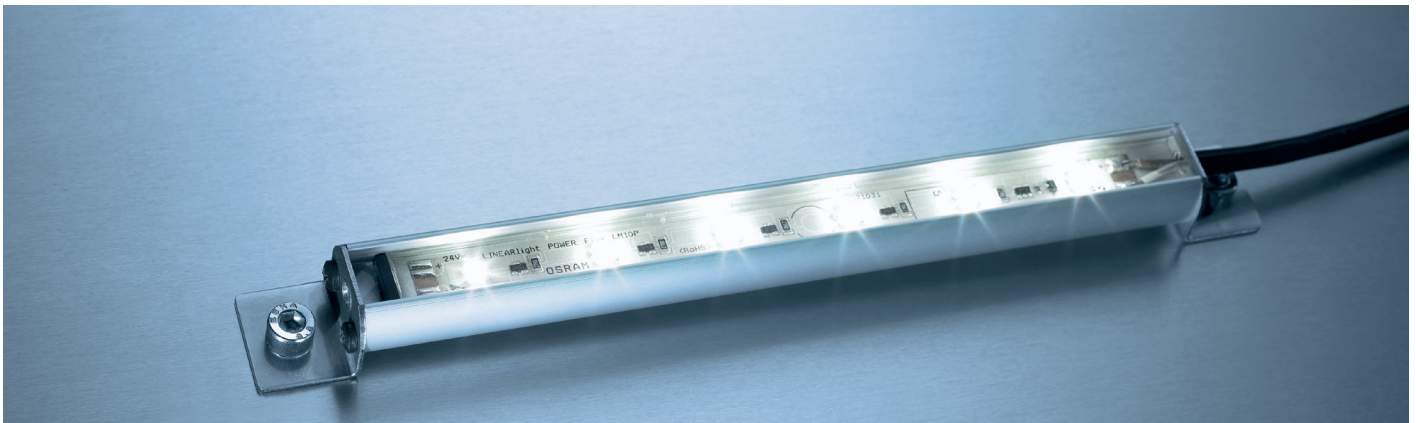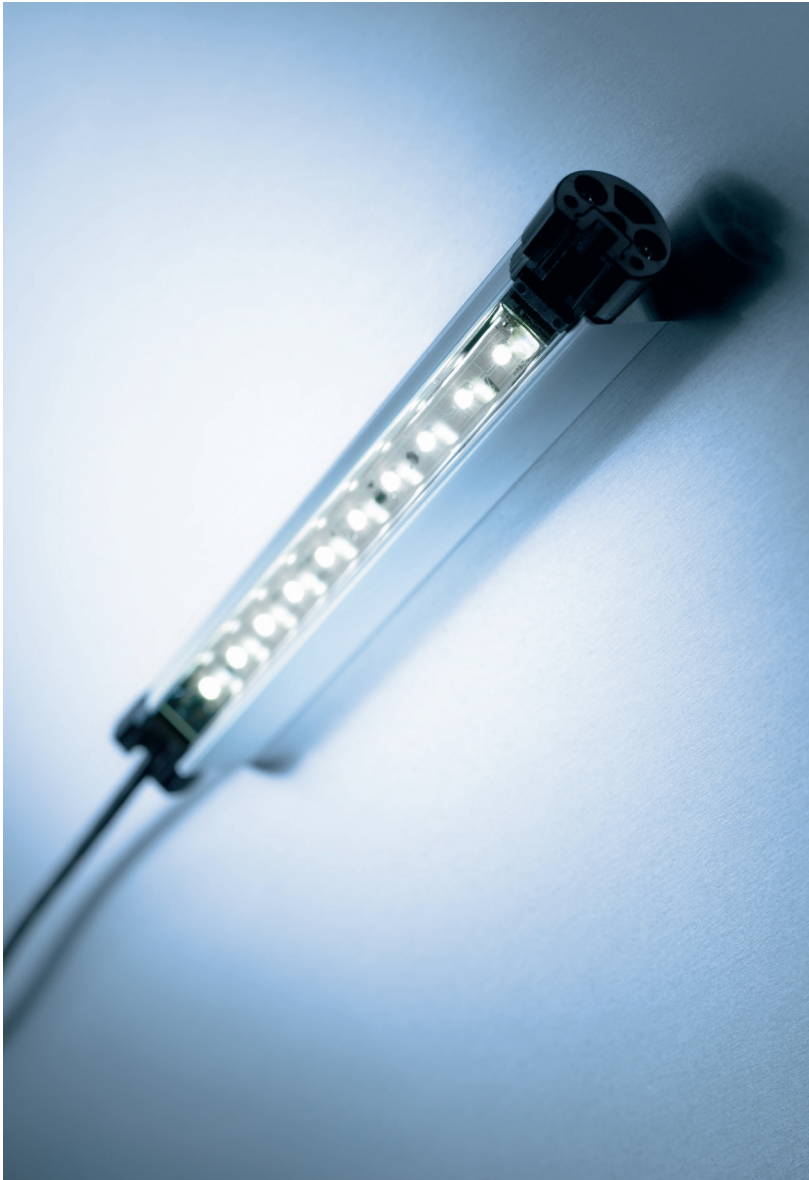


SLIM LED is a family of compact, low-profile LED luminaires designed for both interior and exterior applications. Optimal linear flood lighting is delivered using the latest technology in which the LEDs are directly attached to a flexible circuit board. The sleek profile of SLIM LED allows adjustability to 45° in either direction and five different lengths offer installation flexibility for a wide variety of applications. The compact size allows for easy integration into an existing system, while providing exceptional energy efficiency, low-voltage safety and numerous design possibilities.


PLEASE NOTE: Although SLIM LED is completely waterproof, it is not recommended for use with coolants or lubricants.

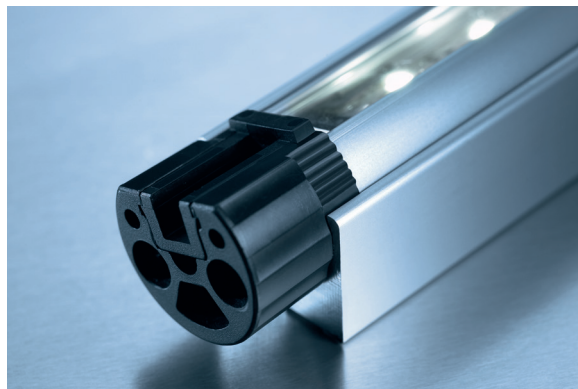

DIMENSIONAL DATA

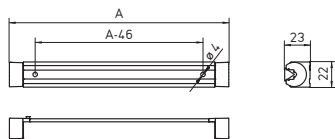

SLIM LED +/- 45° Adjustable Housing

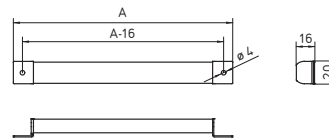

SLIM LED with Flange

Measurements in millimeters

ORDERING INFORMATION

Wattage	Length (A)	Mounting Style	Lens Type	Lumens	Model	Part #
3.5W	7.7" (196mm)	Adjustable	Clear	186	LIQ 6	112 544 000 - 000 013 28
3.5W	7.7" (196mm)	Adjustable	Satine	186	LIQ 6	112 544 005 - 000 111 00
3.5W	7.7" (196mm)	Adjustable	No lens	186	LIQ 6	112 544 010 - 000 111 01
3.5W	7.7" (196mm)	Non-adjustable w/ flange	Clear	186	LIQ 6	112 545 000 - 000 013 51
3.5W	7.7" (196mm)	Non-adjustable w/ flange	Satine	186	LIQ 6	112 545 005 - 000 111 20
3.5W	7.7" (196mm)	Non-adjustable w/ flange	No lens	186	LIQ 6	112 545 010 - 000 111 21
7W	13.2" (336mm)	Adjustable	Clear	372	LIQ 12	112 544 001 - 000 110 81
7W	13.2" (336mm)	Adjustable	Satine	372	LIQ 12	112 544 006 - 000 110 88
7W	13.2" (336mm)	Adjustable	No lens	372	LIQ 12	112 544 011 - 000 111 02
7W	13.2" (336mm)	Non-adjustable w/ flange	Clear	372	LIQ 12	112 545 001 - 000 111 25
7W	13.2" (336mm)	Non-adjustable w/ flange	Satine	372	LIQ 12	112 545 006 - 000 111 28
7W	13.2" (336mm)	Non-adjustable w/ flange	No lens	372	LIQ 12	112 545 011 - 000 111 29
14W	24.3" (616mm)	Adjustable	Clear	744	LIQ 24	112 544 002 - 000 110 82
14W	24.3" (616mm)	Adjustable	Satine	744	LIQ 24	112 544 007 - 000 110 85
14W	24.3" (616mm)	Adjustable	No lens	744	LIQ 24	112 544 012 - 000 111 03
14W	24.3" (616mm)	Non-adjustable w/ flange	Clear	744	LIQ 24	112 545 002 - 000 111 30
14W	24.3" (616mm)	Non-adjustable w/ flange	Satine	744	LIQ 24	112 545 007 - 000 111 31
14W	24.3" (616mm)	Non-adjustable w/ flange	No lens	744	LIQ 24	112 545 012 - 000 111 32
21W	35.3" (896mm)	Adjustable	Clear	1116	LIQ 36	112 544 003 - 000 110 83
21W	35.3" (896mm)	Adjustable	Satine	1116	LIQ 36	112 544 008 - 000 110 86
21W	35.3" (896mm)	Adjustable	No lens	1116	LIQ 36	112 544 013 - 000 111 04
21W	35.3" (896mm)	Non-adjustable w/ flange	Clear	1116	LIQ 36	112 545 003 - 000 111 33
21W	35.3" (896mm)	Non-adjustable w/ flange	Satine	1116	LIQ 36	112 545 008 - 000 111 34
21W	35.3" (896mm)	Non-adjustable w/ flange	No lens	1116	LIQ 36	112 545 013 - 000 111 35
28W	46.3" (1176mm)	Adjustable	Clear	1488	LIQ 48	112 544 004 - 000 110 84
28W	46.3" (1176mm)	Adjustable	Satine	1488	LIQ 48	112 544 009 - 000 110 87
28W	46.3" (1176mm)	Adjustable	No lens	1488	LIQ 48	112 544 014 - 000 111 05
28W	46.3" (1176mm)	Non-adjustable w/ flange	Clear	1488	LIQ 48	112 545 004 - 000 111 36
28W	46.3" (1176mm)	Non-adjustable w/ flange	Satine	1488	LIQ 48	112 545 009 - 000 111 37
28W	46.3" (1176mm)	Non-adjustable w/ flange	No lens	1488	LIQ 48	112 545 014 - 000 111 38

External Operating Devices	Max. Wattage	Input	Output	Part #
Required for 120-277V operation	17W	120-277V DC, 50/60Hz	24V DC	209 585 028
	20W	120-240V, 50/60Hz	24V DC	309 537 010 - 006 704 53
	50W	120V, 50/60Hz	24V DC	209 585 030
	75W	120-277V DC, 50/60Hz	24V DC	209 585 031
	100W	120-277V DC, 50/60Hz	24V DC	309 538 010 - 006 704 56