

TANEO LED OPTIMAL LIGHT FOR MULTITASKING

TANEO is a sophisticated LED lighting solution designed to provide premium performance for a myriad of task lighting applications. With three available light output levels, as well as options for lenses, color rendering and the type of mounting that will work best, TANEO can properly fulfill every luminance requirement.

TANEO is energy-efficient, consuming 30% less energy when compared to conventional task luminaires with the same luminous power. High lighting quality and ergonomic handling make TANEO ideal for manufacturing, assembly or quality control procedures, as well as laboratory, electronic or metalworking environments.



FEATURES:

- Power consumption 14W, 24W or 34W
- 4000K or 5000K color temperature available
- Glare-free - clear prismatic or satine acrylic lens options
- Anodized aluminum housing
- Spring-balanced arm with 3D head joint
- Touch panel integrated in the luminaire head for on/off and 100% to 10% dimming
- Wall power supply (14W) or table power supply (24W and 34W)
- 100–240V, 50/60Hz
- 10' cord with US plug included
- ETL/cETL approved

SPECIFICATIONS:

Voltage	100-240V, 50/60Hz
Lamping	LED
Controls	touch panel w/ switch on head
Color Temperature	4000K or 5000K
Color Rendering Index (CRI)	Satine >90; Prismatic >80
Luminaire Head Material	anodized aluminum
Arm Material	aluminum
Lens Material	polycarbonate
Head Dimension	8.6", 15.7" or 22.7"
Arm Reach	40" reach (arm version)
Power Consumption	14W, 24W or 34W
Protection Rating	IP20
Certification	ETL/cETL approved; CE marked
Cord/Plug	10' power cord w/ plug
Various mounting options and accessories available	





TANEO TECHNICAL DATA



Rotatable Undercabinet

DIMENSIONAL DATA

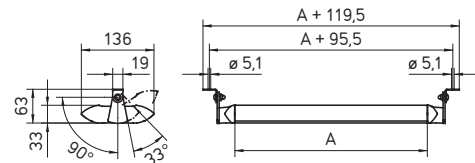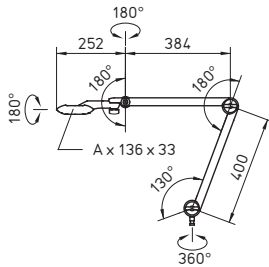

Measurements in millimeters

ORDERING INFORMATION

Version	Wattage	Color Temp.	Lens	Dimension (A)	Lumens	Part #
Articulated arm	12W	4000K	Clear prismatic	8.6" (218mm)	700	113734000-00809719
Articulated arm	12W	5000K	Clear prismatic	8.6" (218mm)	700	113734000-00809720
Articulated arm	12W	4000K	Satine	8.6" (218mm)	600	113734000-00809721
Articulated arm	12W	5000K	Satine	8.6" (218mm)	600	113734000-00809722
Articulated arm	23W	4000K	Clear prismatic	15.7" (398mm)	1500	113735000-00809742
Articulated arm	23W	5000K	Clear prismatic	15.7" (398mm)	1500	113735000-00809744
Articulated arm	23W	4000K	Satine	15.7" (398mm)	1400	113735000-00809746
Articulated arm	23W	5000K	Satine	15.7" (398mm)	1400	113735000-00809747
Articulated arm	30W	4000K	Clear prismatic	22.7" (577mm)	2300	113736000-00809773
Articulated arm	30W	5000K	Clear prismatic	22.7" (577mm)	2300	113736000-00809774
Articulated arm	30W	4000K	Satine	22.7" (577mm)	2000	113736000-00809775
Articulated arm	30W	5000K	Satine	22.7" (577mm)	2000	113736000-00809776
Fixed mount with rotation	23W	4000K	Clear prismatic	14.2" (360 mm)	1500	114460000-00811080
Fixed mount with rotation	23W	5000K	Clear prismatic	14.2" (360 mm)	1500	114460000-00811081
Fixed mount with rotation	23W	4000K	Satine	14.2" (360 mm)	1400	114460000-00811082
Fixed mount with rotation	23W	5000K	Satine	14.2" (360 mm)	1400	114460000-00811083
Fixed mount with rotation	30W	4000K	Clear prismatic	21.2" (539 mm)	2300	114461000-00811114
Fixed mount with rotation	30W	5000K	Clear prismatic	21.2" (539 mm)	2300	114461000-00811115
Fixed mount with rotation	30W	4000K	Satine	21.2" (539 mm)	2000	114461000-00811116
Fixed mount with rotation	30W	5000K	Satine	21.2" (539 mm)	2000	114461000-00811117

Mounting Options	Item	Dimensions	Part #
	Table clamp w/ pin mount (included)	0 x 3.5" span	191 025 069 40
	Wall bracket	3" x 3"	226 108 019 - 006 107 54
	1/2" Pin mount adapter	1.77" length	US0 209 022
	1/2" Pin mount adapter	3.75" length	US0 209 012

Accessories	Item	Strength	Size	Part #
	Add-x magnifier	3.5 diopters (1.88X)	5" diameter	190 207 019 - 005 759 00

Waldmann Lighting Company

9 W. Century Drive
 Wheeling, Illinois 60090
 www.waldmannlighting.com

Telephone (847) 520 1060
 Fax (847) 520 1730
 waldmann@waldmannlighting.com



ENGINEER OF LIGHT.