


## Pole light



**RL70EP - 132 X**

connected load	120-277V; 50/60Hz
fitted with	1 x fluorescent lamp T8 32 W neutral white 4000 K
work equipment	electronic ballast
mains lead	direct power supply
luminaire body	PMMA polymer acrylic satine
material	
weight (net)	approx. 10,3 kg (22.7 lbs)
fastening	screw-down flange
light distribution	all-around illumination
system of protection	IP 67
class of protection	I
total length	1956 mm (77.0")
light output	1183 mm (46.6")
outside diameter	70 mm (2.8")
	A with screwed cable gland
special features	for outdoor use
article no.	112140723
Notice	Switching cycle – In order to achieve a maximum life cycle of lamps and electronic ballasts using i.e. motion detectors PIR (Passive Infrared Sensor) or stairways' automats please consider that a minimum burning time of 15 minutes and a neutral phase of > 3 minutes will be fixed.

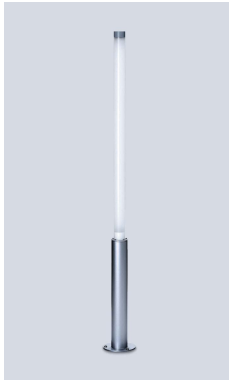