

protective tube luminaire





RL40E - 124

connected load	120-240V; 50/60Hz
fitted with	1 x fluorescent lamp T5 24 W neutral white 4000 K
work equipment	electronic ballast
mains lead	direct power supply
luminaire body material	PMMA polymer acrylic clear
weight (net)	approx. 0,8 kg (1.8 lbs)
fastening	different mounting options available
light distribution	mainly direct
system of protection	IP 67
class of protection	I
total length	1003 mm (39.5")
light output	549 mm (21.6")
outside diameter	40 mm (1.6")
article no.	D with screwed cable gland 112231705

Notice

Switching cycle – In order to achieve a maximum life cycle of lamps and electronic ballasts using i.e. motion detectors PIR (Passive Infrared Sensor) or stairways' automats please consider that a minimum burning time of 15 minutes and a neutral phase of > 3 minutes will be fixed. .

E_{min}: 194 lx
E_m: 285 lx
E_{max}: 364 lx

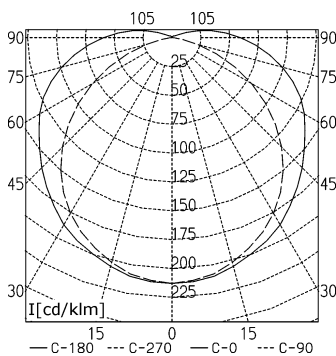

measuring conditions: d=100cm

