

## protective tube luminaire



**RL70E - 132 HD**

connected load  
fitted with

work equipment  
mains lead  
luminaire body  
material

weight (net)  
fastening  
light distribution  
system of protection  
class of protection  
total length  
light output  
outside diameter

article no.

Notice

120-277V; 50/60Hz

1 x fluorescent lamp T8 32 W  
neutral white 4000 K

electronic ballast  
connecting terminal

PMMA polymer acrylic clear  
approx. 2,9 kg (6.4 lbs)  
different mounting options available

direct  
IP 67

I

1464 mm (57.6")

1226 mm (48.3")



70 mm (2.8")

A with screwed cable gland (continuous wiring)

112240702

Switching cycle – In order to achieve a maximum life cycle of lamps and electronic ballasts using i.e. motion detectors PIR (Passive Infrared Sensor) or stairways' automats please consider that a minimum burning time of 15 minutes and a neutral phase of > 3 minutes will be fixed.

E<sub>min</sub>: 163 lx  
E<sub>m</sub>: 208 lx  
E<sub>max</sub>: 243 lx

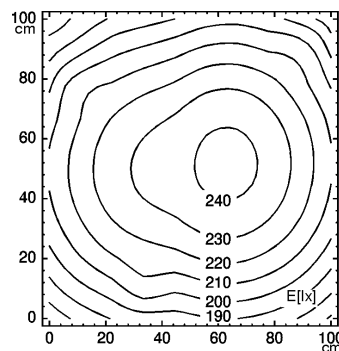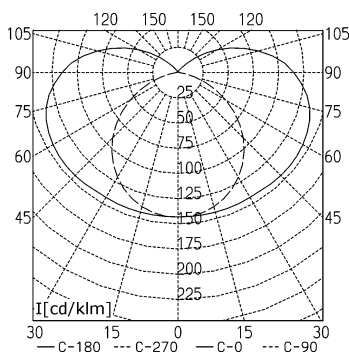

measuring conditions: d=100cm

