

protective tube luminaire




RL70E- 117 X

connected load	120-277V; 50/60Hz
fitted with	1 x fluorescent lamp T8 17 W neutral white 4000 K
work equipment	electronic ballast
mains lead	connecting terminal
luminaire body material	PMMA polymer acrylic satine
weight (net)	approx. 1,9 kg (4.2 lbs)
fastening	different mounting options available
light distribution	all-around illumination
system of protection	IP 67
class of protection	I
total length	1066 mm (42.0")
light output	573 mm (22.6")
outside diameter	70 mm (2.8")
	B with screwed cable gland (not shown)
article no.	112242705

Notice

Switching cycle – In order to achieve a maximum life cycle of lamps and electronic ballasts using i.e. motion detectors PIR (Passive Infrared Sensor) or stairways' automats please consider that a minimum burning time of 15 minutes and a neutral phase of > 3 minutes will be fixed.

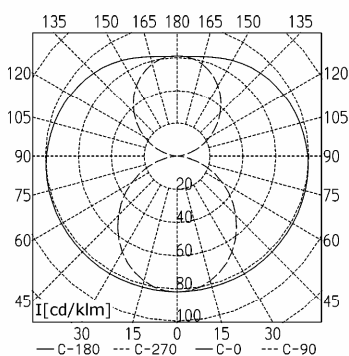

measuring conditions: d=100cm

