

LED machine luminaire



ABLTL 1

connected load
 fitted with
 work equipment
 mains lead
 luminaire body
 material
 surface
 tubular sections
 material
 weight (net)
 fastening
 usage
 lamp cover
 glare-free
 system of protection
 class of protection
 special features
 article no.

depends on operating device
 1 x LED lamp 3 W
 without
 approx. 20" to 80" expandable cord

aluminium
 anodized

flexible metal tube
 approx. 0,9 kg (2.0 lbs)

threaded base
 without switch
 glass screen


without

IP 67


III

Spot with 6° angle of reflected beam

112373000

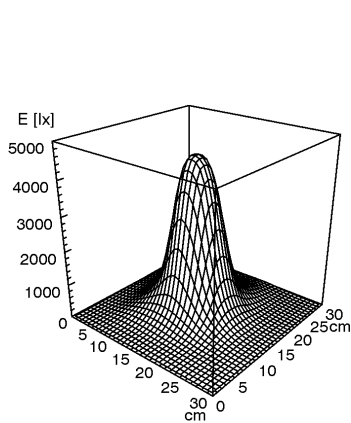

E_{min}: 12 lx
 E_m: 519 lx
 E_{max}: 4525 lx



measuring conditions: d=50cm; I=700mA

