

Halogen Machine Luminaire



HITF 20 S


connected load
 fitted with
 radiation characteristic
 work equipment
 mains lead
 luminaire body
 material
 surface
 tubular sections
 material
 weight (net)
 fastening

 technology
 usage
 lamp cover
 system of protection
 class of protection
 colour luminaire body
 colour of tubular sections
 article no.


12 V; AC/DC
 1 x halogen lamp MRC-16 20 W
 24 ° flood
 without
 approx. 1.5 m (4.9 ft); with free stranded wires

 sectional aluminium
 anodized

 flexible metal tube
 approx. 1,0 kg (2.2 lbs)
 screw-down flange~table base (accessory)~table clamp
 (accessory)~wall bracket (accessory)
 switchable
 switch
 glass screen
 IP 20
 III
 Jet black
 Jet black
 112414085

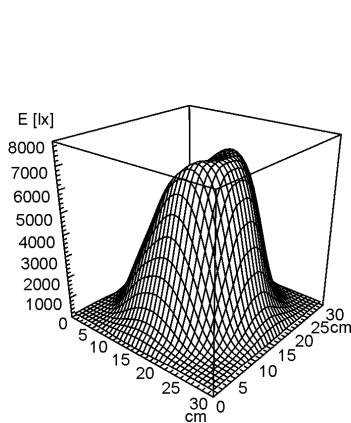

E_{min}: 182 lx
 E_m: 2504 lx
 E_{max}: 7375 lx

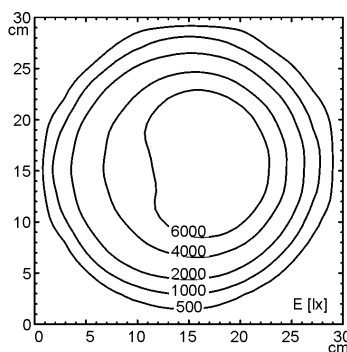

measuring conditions: d=50cm

