LED machine luminaire



ABLTL 1

fitted with work equipment connected load power consumption system of protection class of protection

usage luminaire body material surface colour luminaire body lamp cover tubular sections material weight (net) mains lead fastening

glare-free

special features

article no.



1 x LED lamp without remote constant current driver required approx. 3 W IP 67 III

without switch


aluminium anodised Jet black glass screen

flexible metal tube approx. 1.1 kg (2.43 lbs) approx. 5.0 m (16.5 ft), with 2 wire leads universal base as shown

without

Spot with 6° angle of reflected beam

138474000

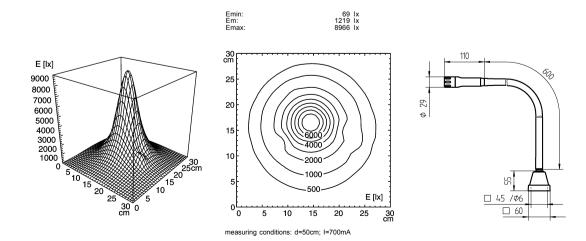

Errors and technical changes excepted. Images can vary from original. © 05.2011 H. Waldmann GmbH & Co. KG