


## light strip




**SLIM LED - LIQ 48**

connected load	22-29 V; DC
fitted with	48 x Light-emitting diode
work equipment	without
mains lead	approx. 3.0 m (10 ft); with free stranded wires
design	mounted version
luminaire body	aluminium/plastic
material	anodised
surface	
weight (net)	approx. 1,0 kg
fastening	screws
power consumption	approx. 29 W
usage	without switch
lamp cover	acrylic clear
system of protection	IP 67
class of protection	III
colour luminaire body	aluminium colored anodised
total length	1176 mm (46.3")
special features	direction of beam +/- 45° adjustable
article no.	112544004

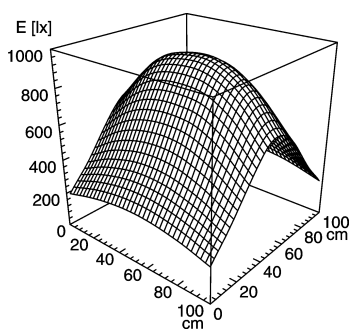

E<sub>min</sub>: 240 lx  
 E<sub>m</sub>: 578 lx  
 E<sub>max</sub>: 946 lx

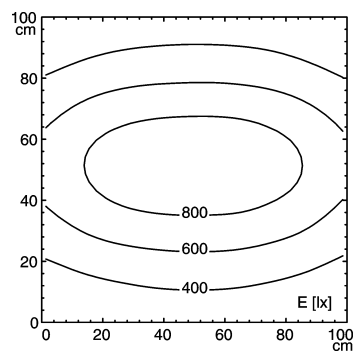

measuring conditions: d=50cm

