

## light strip


#112544005-00011100




**SLIM LED - LIQ 6**

connected load  
fitted with  
work equipment  
mains lead  
design  
luminaire body  
material  
surface  
weight (net)  
fastening  
power consumption  
usage  
lamp cover  
system of protection  
class of protection  
colour luminaire body  
total length  
special features

22-29 V; DC  
6 x Light-emitting diode  
without  
approx. 3.0 m (10 ft); with free stranded wires  
mounted version  
  
aluminium/plastic  
anodised  
approx. 0,2 kg  
screws  
approx. 4 W  
without switch  
Acrylic satine  
IP 67  
III  
aluminium colored anodised  
196 mm (7.7")  
direction of beam +/- 45° adjustable

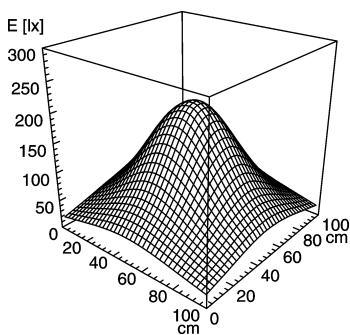

E<sub>min</sub>: 24 lx  
E<sub>m</sub>: 89 lx  
E<sub>max</sub>: 206 lx

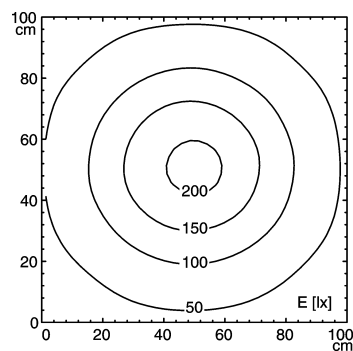

measuring conditions: d=50cm

