


light strip




SLIM LED - LIQ 12

| | |
|-----------------------|---|
| connected load | 22-29 V; DC |
| fitted with | 12 x Light-emitting diode |
| work equipment | without |
| mains lead | approx. 3.0 m (10 ft); with free stranded wires |
| design | mounted version |
| luminaire body | |
| material | aluminium/plastic |
| surface | anodised |
| weight (net) | approx. 0,4 kg |
| fastening | screws |
| power consumption | approx. 8 W |
| usage | without switch |
| lamp cover | potting; clear |
| system of protection | IP 67 |
| class of protection | III |
| colour luminaire body | aluminium colored anodised |
| total length | 336 mm (13.2") |
| special features | direction of beam +/- 45° adjustable |
| article no. | 112544011 |

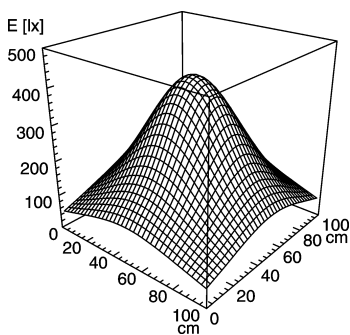

E_{min}: 59 lx
 E_m: 191 lx
 E_{max}: 411 lx

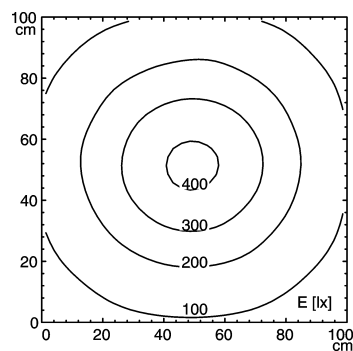

measuring conditions: d=50cm

