


light strip




SLIM LED - LIQ 24

connected load	22-29 V; DC
fitted with	24 x Light-emitting diode
work equipment	without
mains lead	approx. 3.0 m (10 ft); with free stranded wires
design	mounted version
luminaire body	aluminium/plastic
material	anodised
surface	screws
fastening	approx. 15 W
power consumption	without switch
usage	potting; clear
lamp cover	IP 67
system of protection	III
class of protection	aluminium colored anodised
colour luminaire body	616 mm (24.3")
total length	direction of beam +/- 45° adjustable
special features	112544012
article no.	

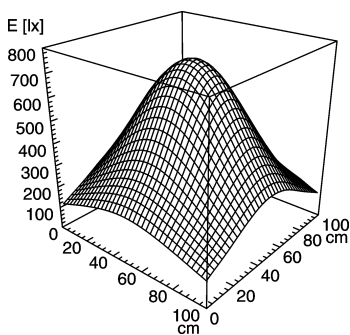

E_{min}: 135 lx
 E_m: 377 lx
 E_{max}: 726 lx

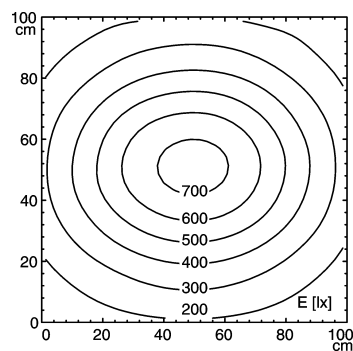

measuring conditions: d=50cm

