

light strip




SLIM LED - LIQ 24


connected load
fitted with
work equipment
mains lead
design
luminaire body
material
surface
fastening
power consumption
usage
lamp cover
system of protection
class of protection
colour luminaire body
total length
article no.

22-29 V; DC
24 x Light-emitting diode
without
approx. 3.0 m (10 ft); with free stranded wires
mounted version

aluminium/plastic
anodised
screws
approx. 15 W
without switch
Acrylic satine
IP 67
III
aluminium colored anodised
616 mm (24.3")
112545007

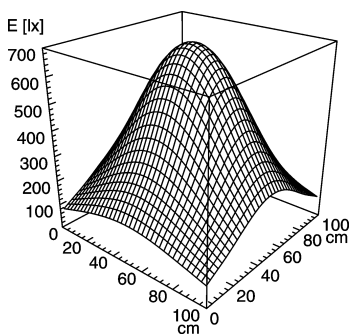

E_{min}: 100 lx
E_m: 336 lx
E_{max}: 691 lx

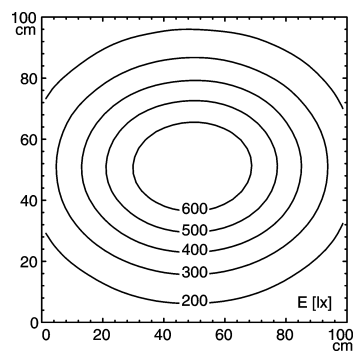

measuring conditions: d=50cm

