


## light strip




**SLIM LED - LIQ 48**

connected load  
fitted with  
work equipment  
mains lead  
design  
luminaire body  
material  
surface  
fastening  
power consumption  
usage  
lamp cover  
system of protection  
class of protection  
colour luminaire body  
total length  
article no.

22-29 V; DC  
48 x Light-emitting diode  
without  
approx. 3.0 m (10 ft); with free stranded wires  
mounted version  
  
aluminium/plastic  
anodised  
screws  
approx. 29 W  
without switch  
Acrylic satine  
IP 67  
III  
aluminium colored anodised  
1176 mm (46.3")  
112545009

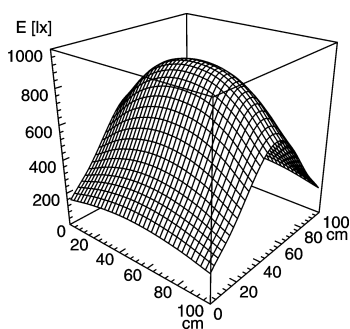

Emin: 200 lx  
Em: 535 lx  
Emax: 908 lx

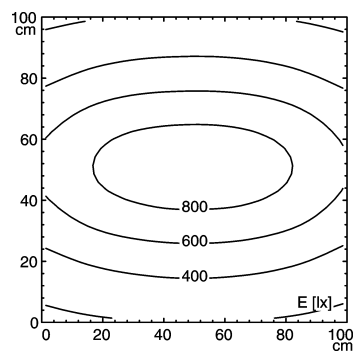

measuring conditions: d=50cm

