

LED machine luminaire



FLAT LED - MYAL 6 S

fitted with
work equipment
connected load
system of protection
class of protection

technology
usage
luminaire body
material
surface
lamp cover
weight (net)
mains lead
fastening

glare-free

article no.

1 x LED lamp 12 W

without

10-30 V, AC

IP 67

III

switchable
without switch

aluminium
anodised


glass screen
approx. 1.0 kg

approx. 3.0 m, with free stranded wires


screws

without

112560002-00006272

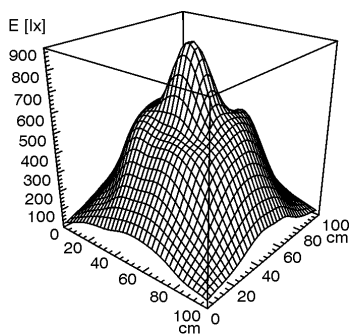

E_{min}: 49 lx
E_m: 347 lx
E_{max}: 869 lx

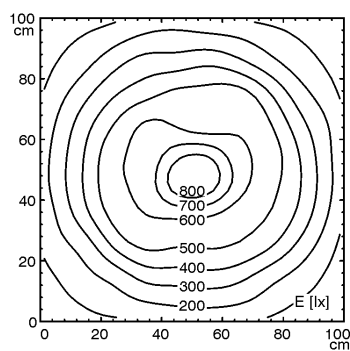

measuring conditions: d=100cm

