


## LED machine luminaire




**MACH LED - MTAL 4 S**

FITTED WITH	4 x Light-emitting diode 6 W
WORK EQUIPMENT	without
CONNECTED LOAD	24 V, 50/60 Hz
POWER CONSUMPTION	approx. 20 W
SYSTEM OF PROTECTION	IP 67
CLASS OF PROTECTION	III
TECHNOLOGY	switchable
USAGE	without switch
LUMINAIRE BODY	
MATERIAL	aluminium
SURFACE	anodised
COLOUR LUMINAIRE BODY	aluminium coloured anodised
LAMP COVER	screen, clear
WEIGHT (NET)	approx. 0.9 kg
MAINS LEAD	approx. 3.0 m, with free stranded wires
FASTENING	lamp bracket (accessory)~pipe clamp (accessory)
TOTAL LENGTH	707 mm
GLARE-FREE	without
SPECIAL FEATURES	angle of radiation 50°
ARTICLE NO.	112567035-00072502



E<sub>min</sub>: 147 lx  
 E<sub>m</sub>: 1077 lx  
 E<sub>max</sub>: 2419 lx

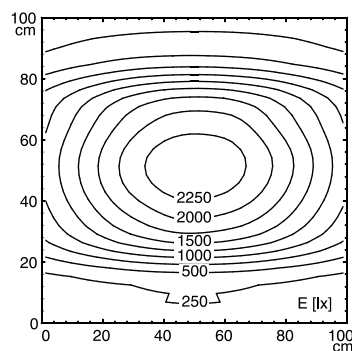

measuring conditions: d=50cm, BIN=N1

