

## Task Luminaire



connected load  
fitted with  
work equipment  
mains lead  
luminaire body  
material  
tubular sections  
material  
surface  
weight (net)  
fastening

120V; 50/60Hz  
1 x compact fluorescent lamp TC-L 18 W  
electronic ballast  
approx. 2.7 m (9.0 ft) cordset

plastic

tubular aluminium section  
painted

approx. 1,7 kg (3.7 lbs)

table clamp (accessory)~wall bracket (accessory)~table base (accessory)~grommet(accessory)~panel bracket(accessory)

approx. 20 W

switchable

switch

aluminiumised parabolic louver

spring

II

black

platinum

power consumption

technology

usage

glare-free

balance of articulation joints

class of protection


colour luminaire body

colour of tubular sections


article no.

138210028

### Roma - double vertical version

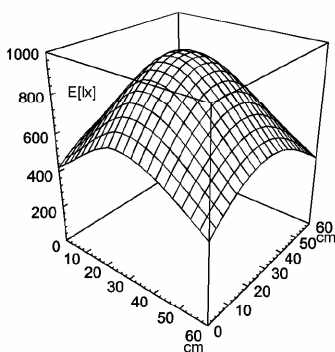

E<sub>min</sub>: 388 lx  
E<sub>m</sub>: 653 lx  
E<sub>max</sub>: 964 lx

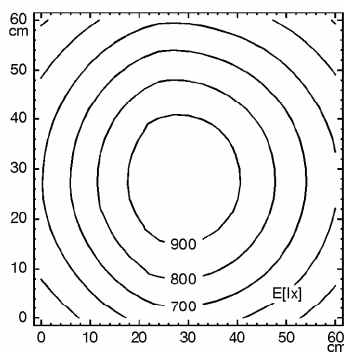

measuring conditions: 50

