

Machine Tube Luminaire



RL40 - 154 S


connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter


article no.

depends on the ballast
1 x fluorescent lamp T5 54 W
neutral white 4000 K
connection to a separate electronic ballast
direct power supply

acrylic clear
approx. 0,9 kg (2.0 lbs)
lamp bracket (accessory)
direct
IP 67
I
1270 mm (50.0")
1141 mm (44.9")
40 mm (1.6")
D with screwed cable gland
138455000

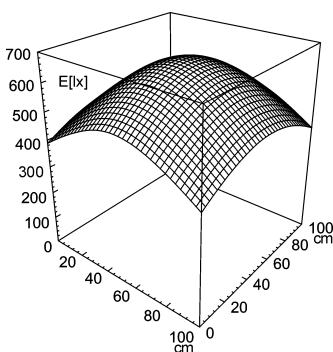

E_{min}: 388 lx
E_m: 533 lx
E_{max}: 654 lx

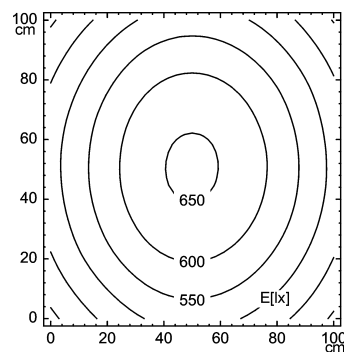

measuring conditions: d=100cm

