

## Machine Tube Luminaire



**RL40 - 154 S**

connected load  
fitted with

work equipment  
mains lead  
luminaire body  
material  
weight (net)  
fastening  
light distribution  
system of protection  
class of protection  
total length  
light output  
outside diameter

article no.

depends on the ballast  
1 x fluorescent lamp T5 54 W  
neutral white 4000 K  
connection to a separate electronic ballast  
direct power supply

borosilicate glass  
approx. 1.0 kg (2.2 lbs)  
lamp bracket (accessory)

direct

IP 67

I


1270 mm (50.0")

1141 mm (44.9")


40 mm (1.6")

D with screwed cable gland

138455001

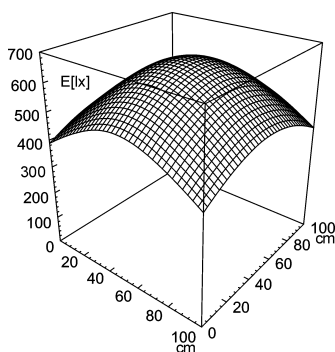

E<sub>min</sub>: 388 lx  
E<sub>m</sub>: 533 lx  
E<sub>max</sub>: 654 lx

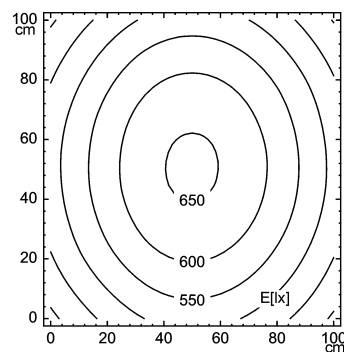

measuring conditions: d=100cm

