

## Machine Tube Luminaire



**RL40 - 139 S**


connected load  
fitted with

work equipment  
mains lead  
luminaire body  
material  
weight (net)  
fastening  
light distribution  
system of protection  
class of protection  
total length  
light output  
outside diameter


article no.

depends on the ballast  
1 x fluorescent lamp T5 39 W  
neutral white 4000 K  
connection to a separate electronic ballast  
direct power supply

acrylic clear  
approx. 0.7 kg (1.5 lbs)  
lamp bracket (accessory)  
direct  
IP 67  
I  
970 mm (38.2")  
841 mm (33.1")  
40 mm (1.6")  
D with screwed cable gland  
138456000

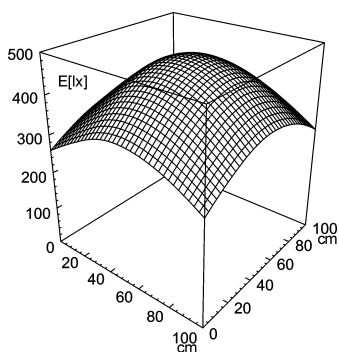

E<sub>min</sub>: 260 lx  
E<sub>m</sub>: 378 lx  
E<sub>max</sub>: 476 lx

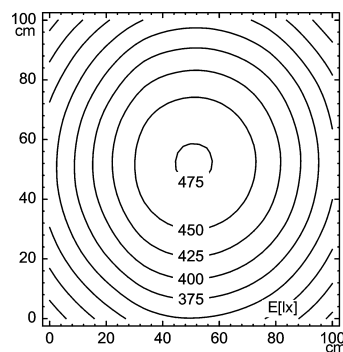

measuring conditions: d=100cm

