

Machine Tube Luminaire



RL40 - 139 S


connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter


article no.

depends on the ballast
1 x fluorescent lamp T5 39 W
neutral white 4000 K
connection to a separate electronic ballast
direct power supply

borosilicate glass
approx. 1,1 kg (2.4 lbs)
lamp bracket (accessory)
direct
IP 67
I
970 mm (38.2")
841 mm (33.1")
40 mm (1.6")
D with screwed cable gland
138456001

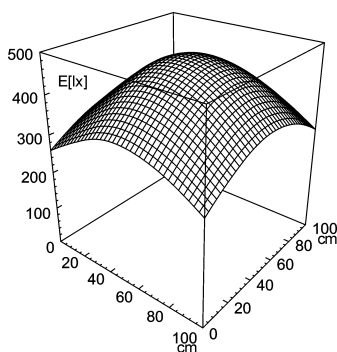

E_{min}: 260 lx
E_m: 378 lx
E_{max}: 476 lx

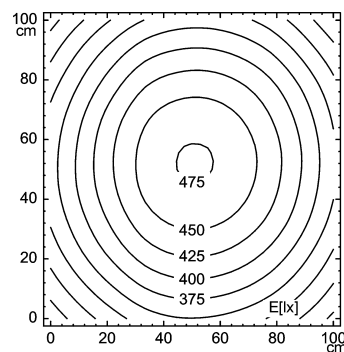

measuring conditions: d=100cm

