

Machine Tube Luminaire



RL40 - 124 S

connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter

article no.

depends on the ballast

1 x fluorescent lamp T5 24 W
neutral white 4000 K

connection to a separate electronic ballast

direct power supply

borosilicate glass

approx. 0,9 kg (2.0 lbs)

lamp bracket (accessory)

mainly direct

IP 67

I


670 mm (26.4")

541 mm (21.3")


40 mm (1.6")

D with screwed cable gland

138457001

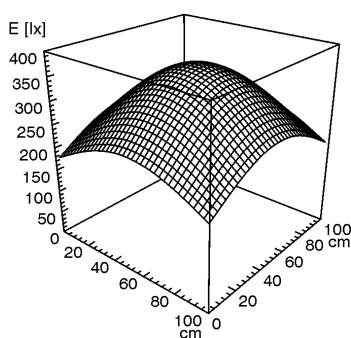

E_{min}: 194 lx
E_m: 285 lx
E_{max}: 364 lx

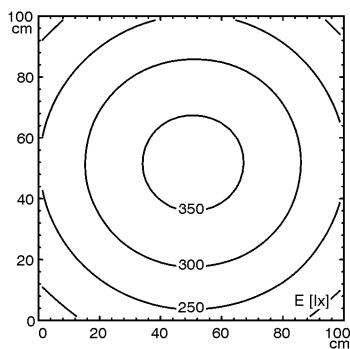

measuring conditions: d=100cm

