

LED machine luminaire



ABLTL 1



connected load
 fitted with
 work equipment
 mains lead
 luminaire body
 material
 surface
 tubular sections
 material
 weight (net)
 fastening
 usage
 lamp cover
 glare-free
 system of protection
 class of protection
 special features
 article no.

remote constant current driver required
 1 x LED lamp 3 W
without
 approx. 20" to 80" expandable cord to operating device

aluminium
 anodized

flexible metal tube
 approx. 0,9 kg (2.0 lbs)
 universal mounting base (not shown)
 without switch
 glass screen
 without
 IP 67
 III

Spot with 6° angle of reflected beam
138474000

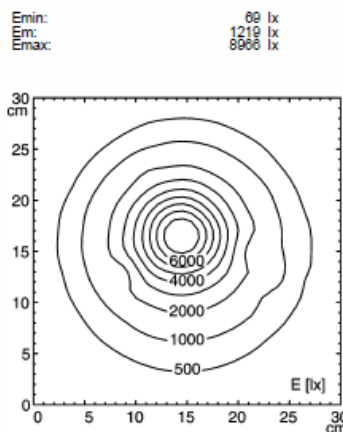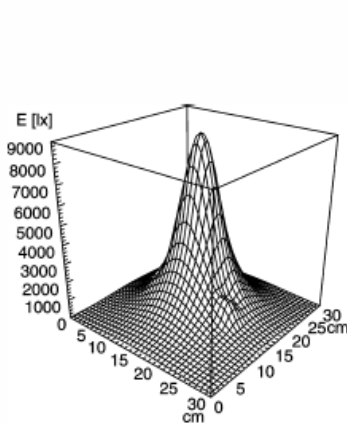

measuring conditions: d=50cm, I=700mA

