

## protective tube luminaire





### RL70E - 117 HD

connected load	120-277V; 50/60Hz
fitted with	1 x fluorescent lamp T8 17 W neutral white 4000 K
work equipment	electronic ballast
mains lead	connecting terminal
luminaire body material	PMMA polymer acrylic clear
weight (net)	approx. 1,8 kg (4.0 lbs)
fastening	different mounting options available
light distribution	direct
system of protection	IP 67
class of protection	I
total length	886 mm (34.9")
light output	619 mm (24.4")
outside diameter	70 mm (2.8")
article no.	A with screwed cable gland (continuous wiring) 138476000

#### Notice

Switching cycle – In order to achieve a maximum life cycle of lamps and electronic ballasts using i.e. motion detectors PIR (Passive Infrared Sensor) or stairways' automats please consider that a minimum burning time of 15 minutes and a neutral phase of > 3 minutes will be fixed.

E<sub>min</sub>: 114 lx  
E<sub>m</sub>: 158 lx  
E<sub>max</sub>: 197 lx

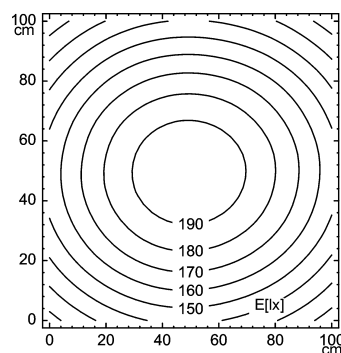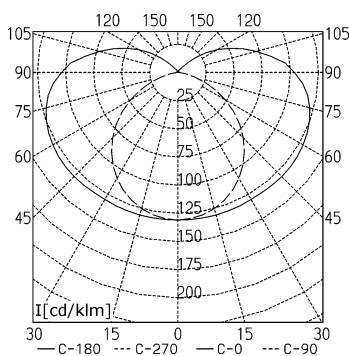

measuring conditions: d=100cm

