

Integrated Machine Luminaire





EBL 213

connected load
 fitted with
 work equipment
 mains lead
 luminaire body
 material
 surface
 weight (net)
 fastening
 technology
 usage
 lamp cover
 system of protection
 class of protection
 colour luminaire body
 article no.

120 V; 60 Hz
 2 x compact fluorescent lamp TC-S 13 W
 conventional ballast
 approx. 4.8 m (16 ft); with free stranded wires

aluminium
 painted
 approx. 2,1 kg (4.6 lbs)
 self-tapping 3xM6
 switchable
 without switch
 screen; milky
 IP 54
 I
 stone grey
 108070000

E_{min}: 217 lx
 E_m: 673 lx
 E_{max}: 1424 lx

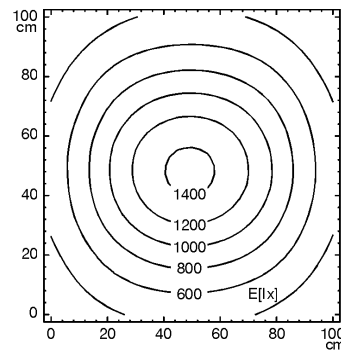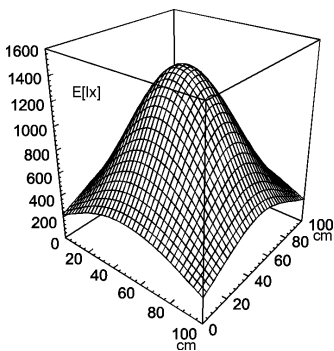

measuring conditions: 50

