

Machine Tube Luminaire

RL70C -118 S 108210000-00055526





connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter

depends on the ballast
1 x compact fluorescent lamp TC-L 18 W
neutral white 4000 K
connection to a separate electronic ballast
direct power supply

acrylic clear
approx. 1.0 kg (2.2 lbs)
lamp bracket (accessory)
direct
IP 67
I
367 mm (14.4")
198 mm (7.8")
70 mm (2.8")
A with screwed cable gland

E_{min}: 108 lx
E_m: 160 lx
E_{max}: 205 lx

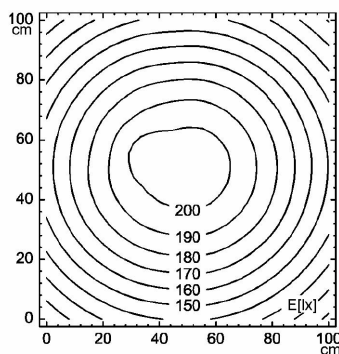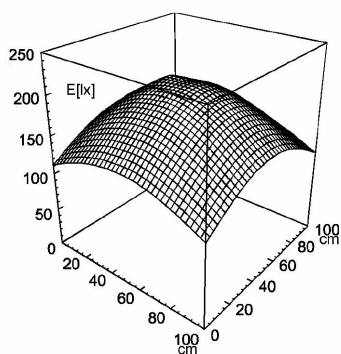

measuring conditions: d=100cm

