

Machine Tube Luminaire



RL70C - 118 S

connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter

article no.

depends on the ballast

1 x compact fluorescent lamp TC-L 18 W
neutral white 4000 K

connection to a separate electronic ballast

direct power supply

borosilicate glass

approx. 1,5 kg (3.3 lbs)

lamp bracket (accessory)

direct

IP 67

I


367 mm (14.4")

198 mm (7.8")


70 mm (2.8")

A with screwed cable gland

108210001

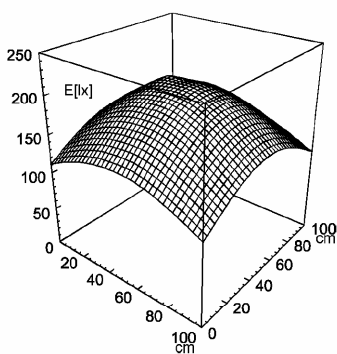

E_{min}: 108 lx
E_m: 160 lx
E_{max}: 205 lx

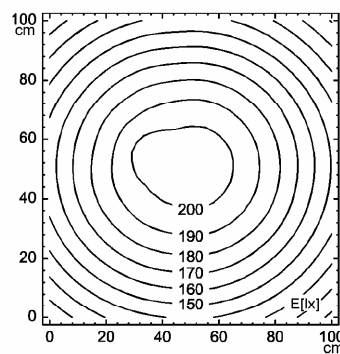

measuring conditions: d=100cm

