


Universal Machine Luminaire




WD 213

connected load	120 V; 60 Hz
fitted with	2 x compact fluorescent lamp TC-S 13 W
work equipment	conventional ballast
mains lead	approx. 3.0 m (10 ft); rubber-insulated cable with shaped plug
design	213
luminaire body	
material	aluminium
surface	painted
tubular sections	
material	steel tube
surface	painted
weight (net)	approx. 3,1 kg (6.8 lbs)
fastening	clamp (accessory)
technology	switchable
usage	switch
lamp cover	screen; milky
system of protection	IP 54
class of protection	I
colour luminaire body	light grey
colour of tubular sections	light grey
article no.	108400001

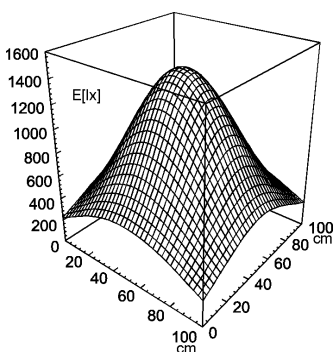

E_{min}: 217 lx
 E_m: 673 lx
 E_{max}: 1424 lx

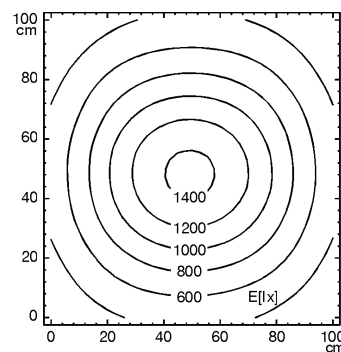

measuring conditions: 50

